

# MikroBOTIK

KIT PEMBELAJARAN ROBOTIK ALAF BARU



- Robot pembelajaran dengan spesifikasi pertandingan.
- Pergerakan berautonomi mengikut garisan.
- Pergerakan bebas dengan kawalan 'Bluetooth'.
- Pengekodan grafik yang mudah dan seronok.



```
when Arduino Uno starts up  
  forever  
    if  
      read analog pin (A) 3 > 50 then  
        set digital pin 11 output as high  
        set digital pin 12 output as low  
      else  
        set digital pin 11 output as low  
        set digital pin 12 output as high
```




# Contents

Element of Robotics.....	1
What is Electronic Hardware?.....	2
What is Software Coding?.....	3
Path Finding Robot.....	4
Contents in the box.....	5
*Mikrobotik* Pathfinding Robot.....	6
Arduino Nano Microcontroller.....	7
Low Battery Indicator.....	8
Installation of mBlock v5.....	9
Steps for Adding Mikrobotik.....	11
Calibration Process.....	12
Type of Junctions.....	19
Objective 1: Vroom Vroom.....	21
Introduction to Buzzer.....	21

Step by Step block arrangement .....	21
Challenge .....	23
<b>Objective 2: Please Switch On The Lights!</b> .....	24
Introduction to Light-Emitting Diode (LED).....	24
Step by Step block arrangement .....	24
Challenge .....	26
<b>Objective 3: Our Adventure Begin (Free Movement)</b> .....	27
Introduction to Motors.....	27
Introduction to Basic of Free Movement.....	28
Step by Step block arrangement .....	31
Challenge .....	36
<b>Objective 4: Let's Follow The Line!</b> .....	37
Introduction to Line Detector.....	37
Introduction to Line Tracer Time and its Mechanism.....	37
Step by Step block arrangement:.....	38
Challenge .....	40

<b>Objective 5: What To Do When Meeting Junction?</b> .....	41
Introduction to <i>Path Finder</i> and its Mechanism.....	41
Step by Step Block Arrangement:.....	42
Challenge .....	44
<b>Objective 6: What Else Can Be Done When Meeting Junction?</b> .....	46
Introduction to <i>Path Finder Tank</i> and its Mechanism.....	46
Step by Step block arrangement:.....	47
Challenge .....	49
<b>Objective 7: Wrong way? Make U-turn</b> .....	51
Introduction to <i>Turn At Centre</i> and its Mechanism.....	51
Step by Step blocks arrangement.....	52
Challenge.....	54
<b>Objective 8: Let's Control Mikrobotik</b> .....	55
Introduction to Bluetooth and its Mechanism.....	55
Step by Step block arrangement:.....	56
Mikrobotik Mobile Apps.....	61

Challenge .....	62
<b>Objective 9: We Need Area Patrol!</b> .....	63
Introduction to Movement and Its Mechanisms.....	63
Step by Step Block Arrangement .....	66
<b>Objective 10: Let's Find Hidden Treasures.</b> .....	69
Introduction to Push Button.....	70
Introduction to Movement and Its Mechanisms.....	70
Step by Step Block Arrangement:.....	74
<b>Extra: Try Upgrade and Self Program</b> .....	78

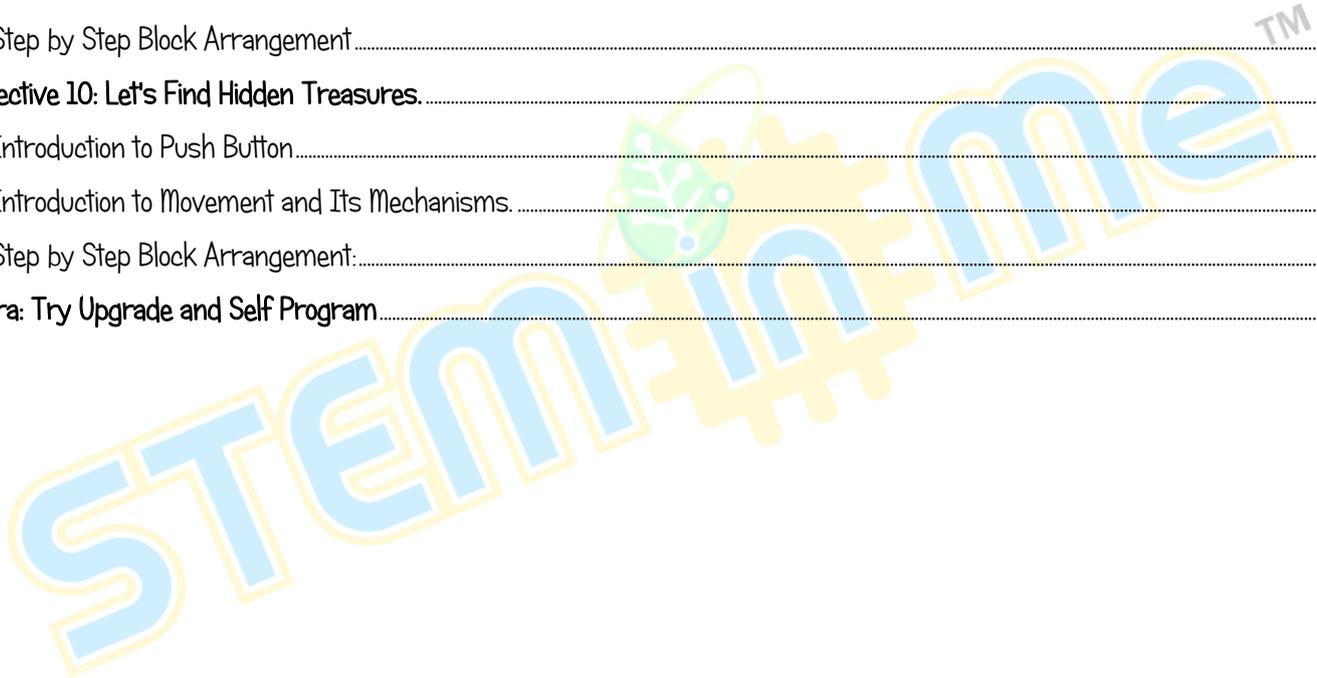



Mechanical Structure



Mechanical Movement

## Element of Robotics



Electronic Hardware



Software Coding



## What is Electronic Hardware?



Detects and senses the surrounding



Controls or reacts to surrounding

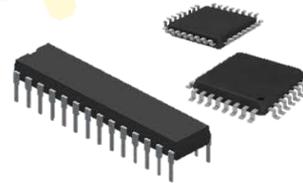

## What is Software Coding?

Electronic Hardware  
Controller



Sets of instruction  
written in specific  
language



Operate





## Path Finding Robot

Robot designed and built specifically to detect and autonomously follow white and black line. Besides, robot also designed for other functions such as obstacle detector and moving small objects.

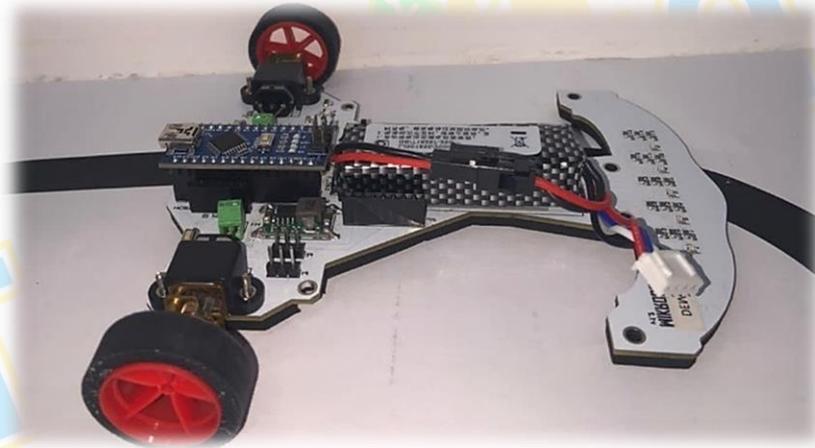


Figure 1: "MikroBotik" Pathfinding Robot



## Contents in the box

- 1x Usb Cable
- 1x Charger
- 1x Mikrobotik
- 1x Bluetooth Module
- 1x Mikrobotik Track



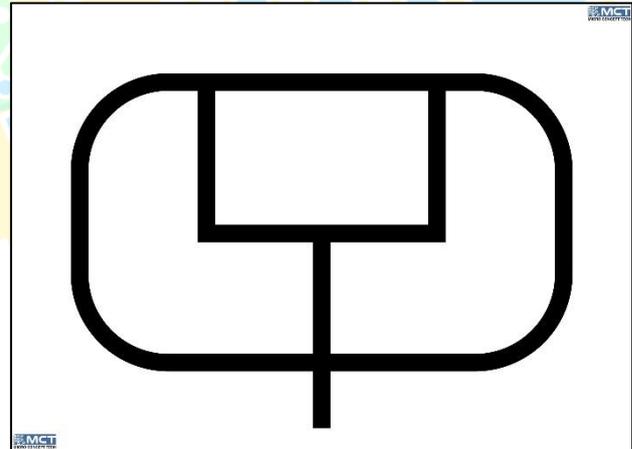


Figure 2: Mikrobotik Track

# "Mikrobotik" Pathfinding Robot

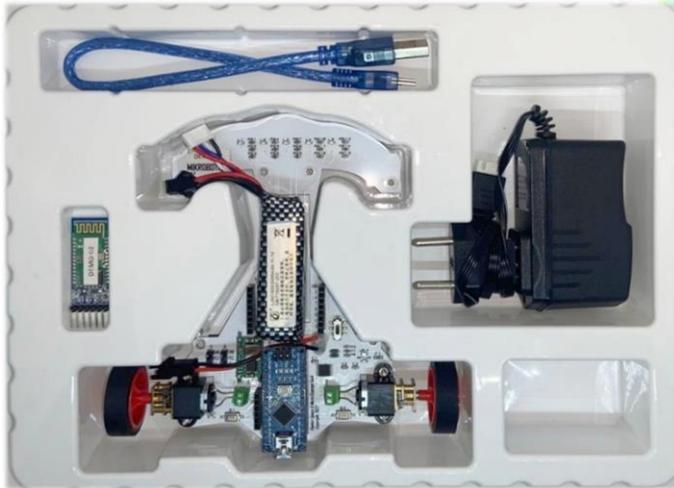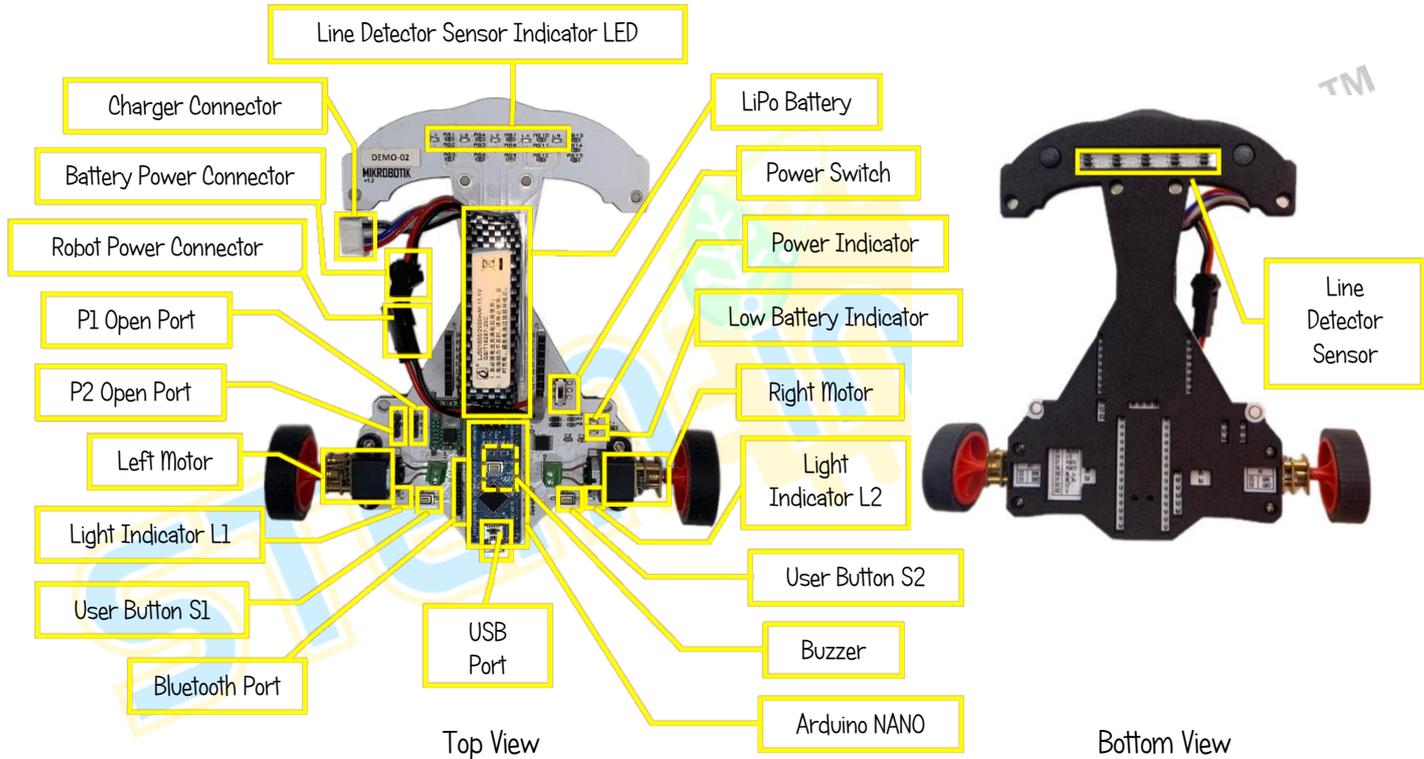

# Arduino Nano Microcontroller


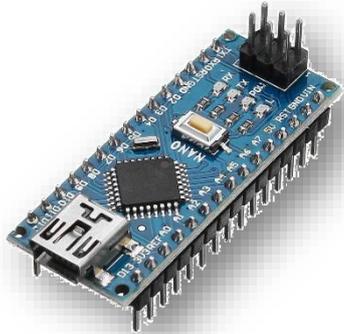


Figure 3: Arduino Nano Atmega328p

A microcontroller is a device that handles core functions such as controlling the use of other electronic hardware connected to it, analyzing data and executing logic.

Mikrobotics uses an Arduino Nano microcontroller that acts as the brain to control the entire hardware and movement of the robot.

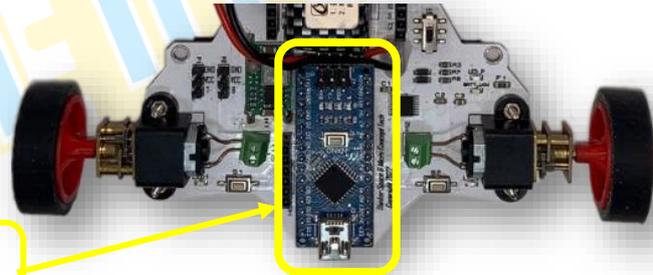

Arduino Nano microcontroller on MikroBotik

## Low Battery Indicator


Low battery indicator will light up red colour.  
The lower the voltage value in battery, the brighter the indicator.  
Minimum voltage operated: 11.0 V (Low battery indicator light at maximum bright)



User need to stop using Mikrobotik and start charging when low battery indicator lights at maximum.



Low battery indicator when battery is low.

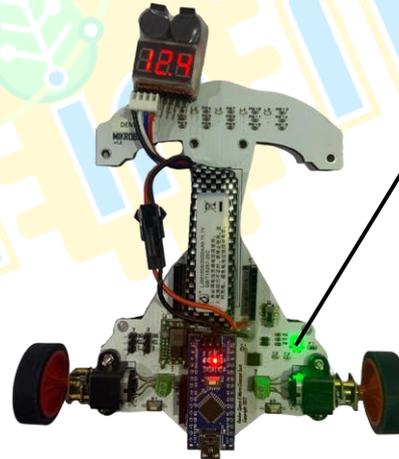

Low battery indicator when battery is full.



# Installation of mBlock v5

Step 1

mBlock v5 software can be obtained from:

Link: <https://mblock.makeblock.com/en-us/download/> @ QR:



Step 2

Download the latest version of mBlock v5 based on the computer operating system.



Step 3

Click mBlock v5 on your download location.

 V5.4.0


22/9/2022 4:33 PM

Application

251,230 KB


Step 4

Wait until mBlock v5 installation is complete.

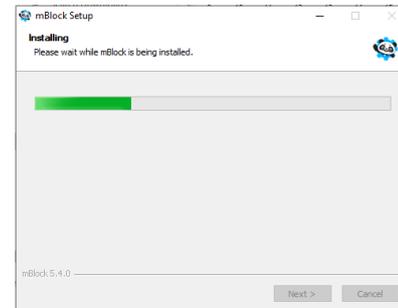


Step 5

Click *INSTALL*:

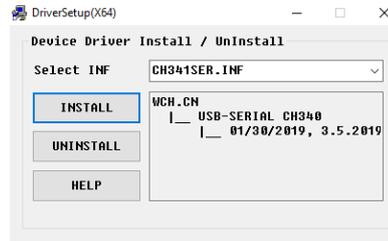


Step 6

Click OK and exit

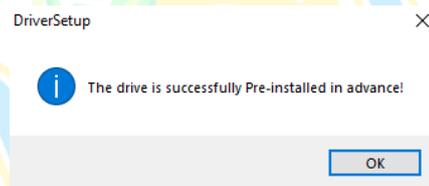

Step 7

Tick *Run mBlock*.  
Click *Finish*.

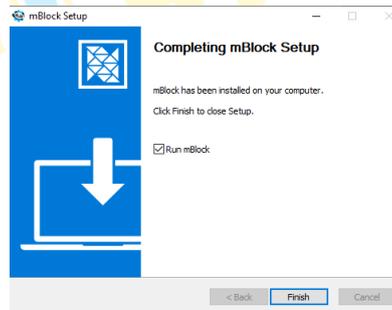



## Steps for Adding Mikrobotik

Step 1

Mikrobotik software can be obtained from:

Link: <https://www.microconcept.com.my/stem-robotic/download/>


Step 2

Open mBlock v5



Step 3

Go to mikrobotik.mext file and drag into mBlock v5.

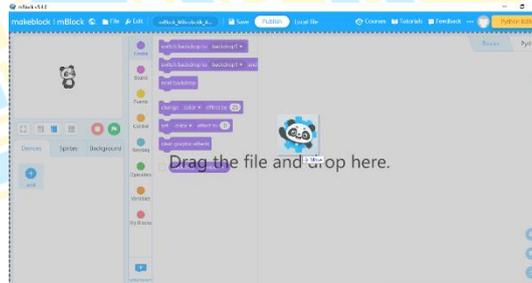


Step 4

Now, you can enjoy using mBlock v5!

## Calibration Process

The calibration process is an important process for the robot to identify between the white line and the black line. The calibration process for this Mikrobotik robot can be done both manually and automatically. This process is done before the robot can follow the line and complete the circuit.

### Block Arrangement (Automatic Calibration):

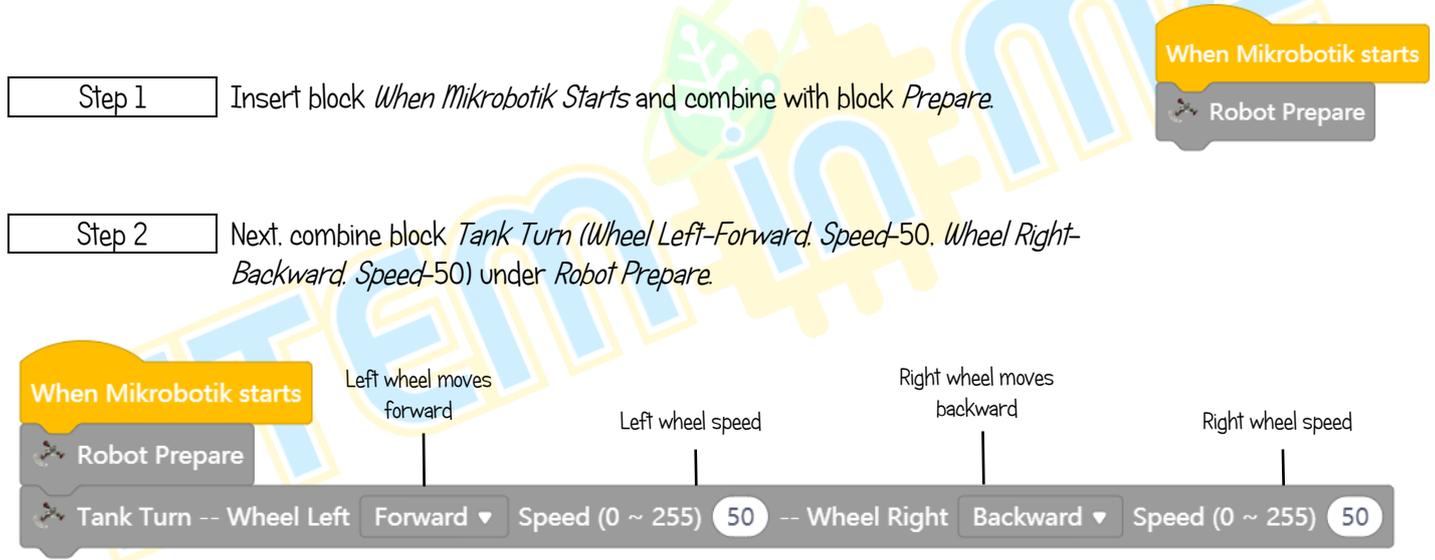


## Step 3

Furthermore, combine block *Repeat* with block *Calibrate Sensor*.  
Combine these blocks with blocks in Step 2.

## Step 4

Lastly, drag *Stop* and block *Wait (1 second)* and put under block *Repeat*.

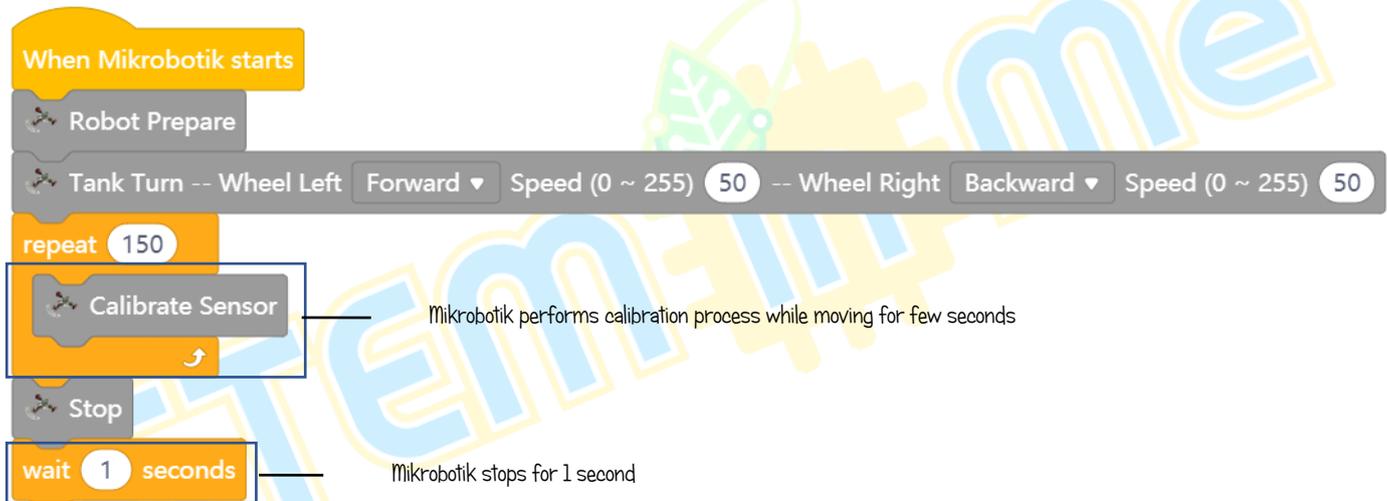

The image shows a Scratch script for MikroBOTIK. It starts with a yellow 'When MikroBOTIK starts' block. Below it is a grey 'Robot Prepare' block. Then a grey 'Tank Turn -- Wheel Left' block with a dropdown menu set to 'Forward', a speed input of '50', and 'Wheel Right' set to 'Backward' with another speed input of '50'. This is followed by an orange 'repeat' block with a count of '150'. Inside the repeat loop, there are three blocks: a grey 'Calibrate Sensor' block, a grey 'Stop' block, and an orange 'wait' block with a duration of '1 seconds'. Two lines with arrows point from text descriptions to the 'Calibrate Sensor' and 'wait' blocks.

When MikroBOTIK starts

Robot Prepare

Tank Turn -- Wheel Left Forward ▾ Speed (0 ~ 255) 50 -- Wheel Right Backward ▾ Speed (0 ~ 255) 50

repeat 150

Calibrate Sensor

Stop

wait 1 seconds

MikroBOTIK performs calibration process while moving for few seconds

MikroBOTIK stops for 1 second

## Steps for Automatic Calibration Process

Step 1


Put Mikrobotik on the track.

Make sure all sensors starting from TR1 (LED L1) until TR5 (LED L5) were put on black line.


Step 2

Switch on the power switch for Mikrobotik.

Red LED1 light and blue LED2 will light up. The robot will automatically rotate to carry out the calibration process.

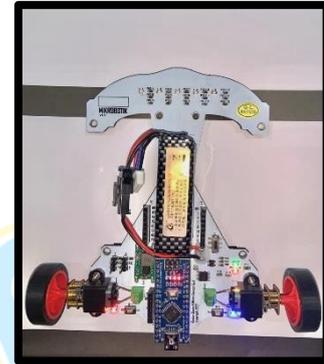

## Block Arrangement (Manual Calibration):

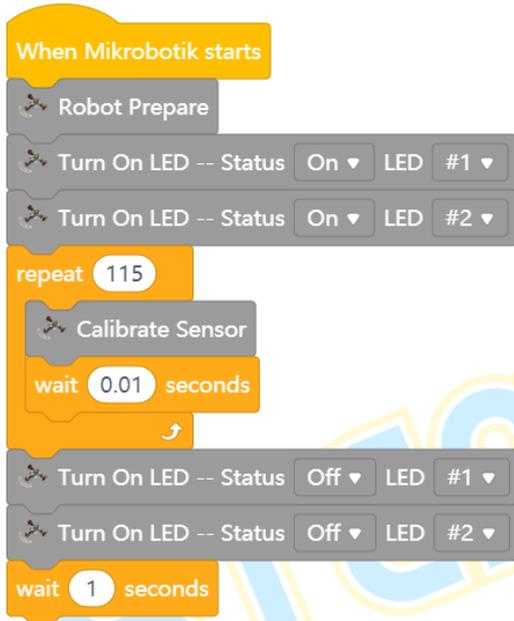

```
When Mikrobotik starts
  Robot Prepare
  Turn On LED -- Status On LED #1
  Turn On LED -- Status On LED #2
  repeat 115
    Calibrate Sensor
    wait 0.01 seconds
  Turn On LED -- Status Off LED #1
  Turn On LED -- Status Off LED #2
  wait 1 seconds
```



The image shows a Scratch script for manual calibration. It starts with a 'When Mikrobotik starts' event block. This is followed by a 'Robot Prepare' block, then two 'Turn On LED' blocks for LEDs #1 and #2, both with the status set to 'On'. A 'repeat' loop block is set to 115 iterations. Inside the loop, there is a 'Calibrate Sensor' block followed by a 'wait 0.01 seconds' block. After the loop, there are two 'Turn On LED' blocks for LEDs #1 and #2, both with the status set to 'Off'. Finally, there is a 'wait 1 seconds' block at the end of the script.

## Steps for Manual Calibration Process

Step 1

Switch on Mikrobotik.

LED1 with red colour and LED2 with blue colour will light up.

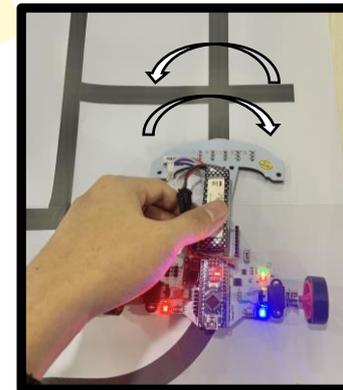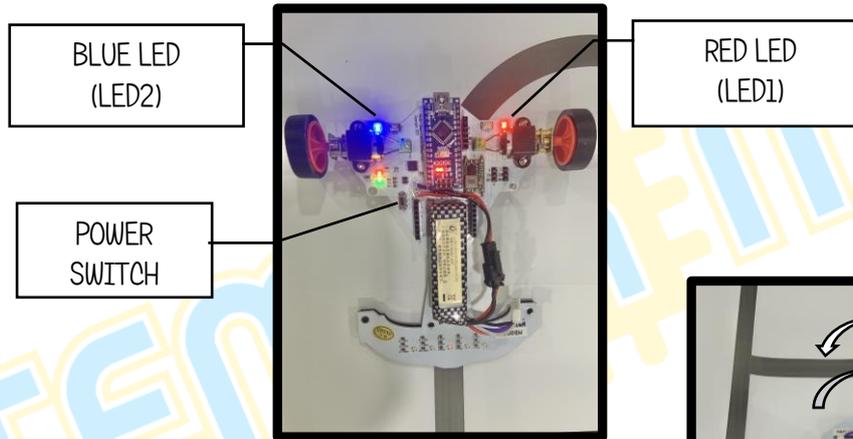

Step 2

Move all sensors starting from sensor labelled with TR1 (LED L1) until TR5 (LED L5) and bring back to TR1 (LED L1).


Step 3

Repeat movement in Step 2 until both LED (LED1 and LED2) light off.



Make sure all the sensors can detect the black line. The LED on the sensors will light up if the sensor detects a black line. For example LED L1 will light up if sensor TR1 detects a black line on the circuit.


RED LED (LED1)  
LIGHTS OFF.

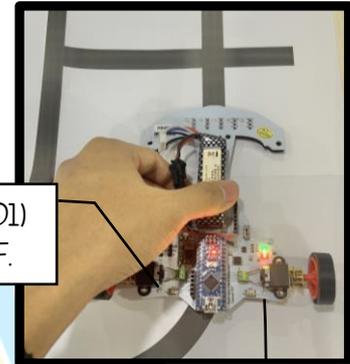


BLUE LED (LED2)  
LIGHTS OFF

# Autonomous Robot PID Algorithm

PID algorithm is a control strategy suitable to assist determine the direction and speed of the robot such that it autonomously drive and follows the line as close and fast possible. PID algorithm will ensure the robot does not overshoot from the line track when turning and moves straight along the line.

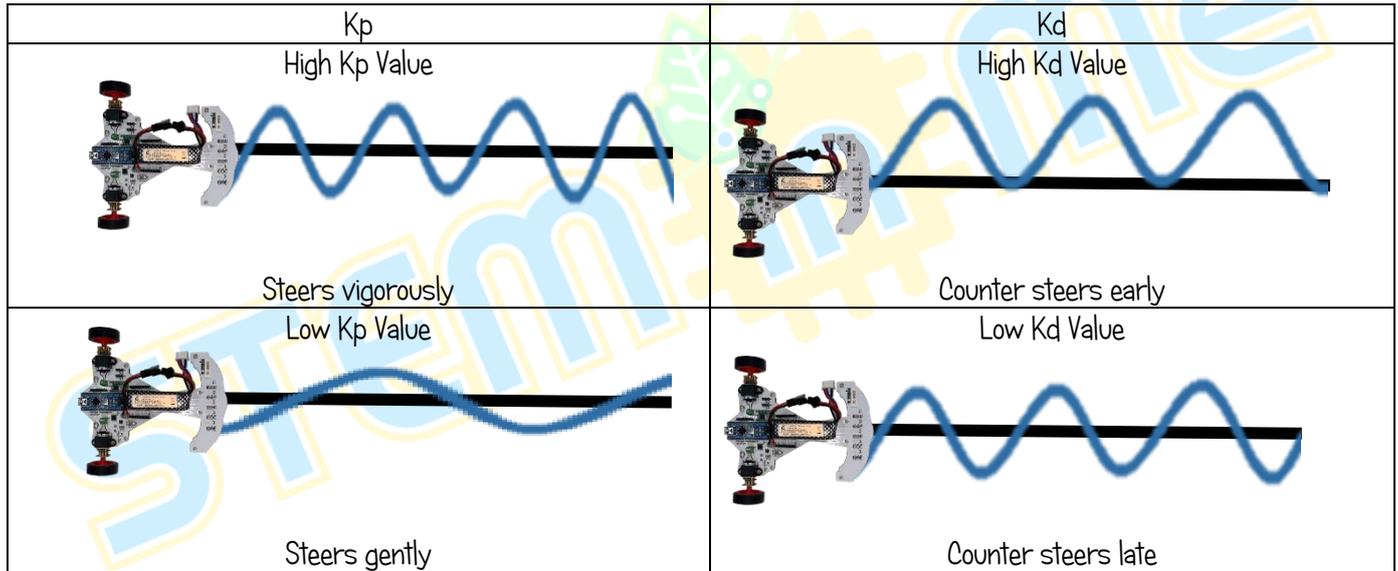


# Type of Tracks

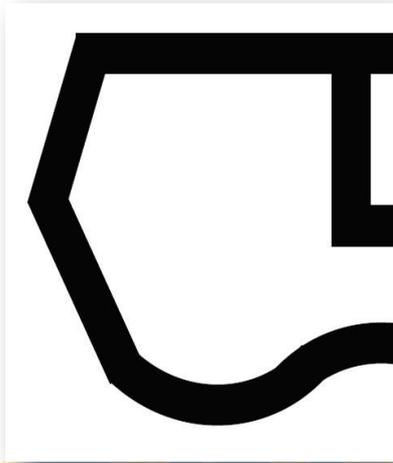

Black Line  
(aprox 20mm)




White Line  
(aprox 20mm)

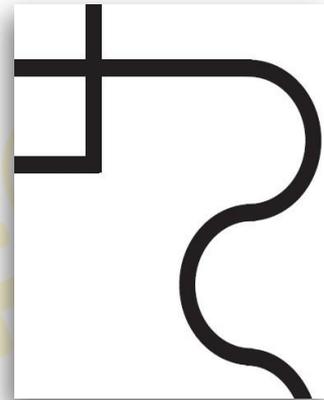

Black Thin Line  
(aprox 10mm)

## Type of Junctions

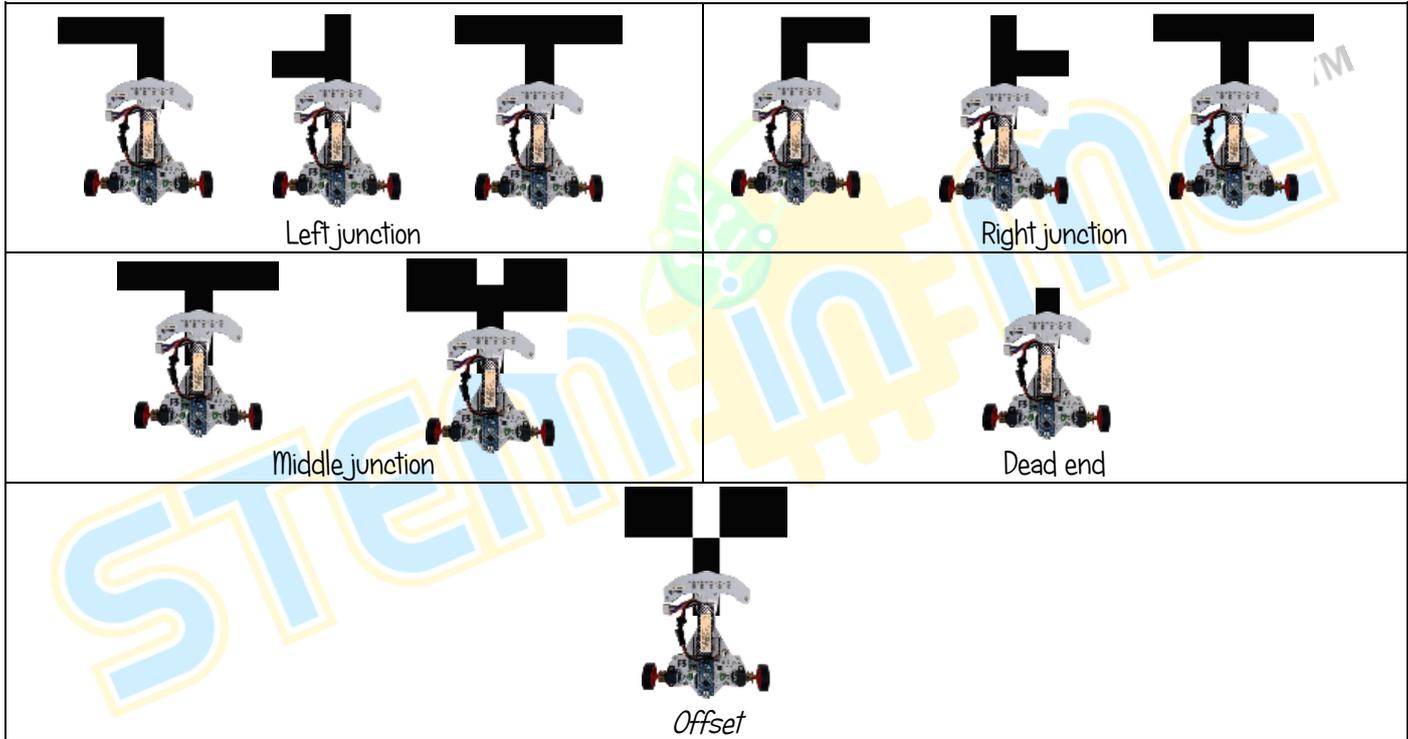

# Objective 1: Vroom Vroom

The robot will use a buzzer to produce a simple sound. It can only produce one tone at a time. This code block can be used to produce different tones to create an interesting sound pattern.

## Introduction to Buzzer



Buzzer is a type of sound device that converts audio models into sound signals. It is usually used for alarms.

## Step by Step block arrangement:

Step 1


Combine block *When Mikrobotik starts* with block *Robot Prepare*.



This block is to prepare robot with specific *library* and to configure pin numbers and pot numbers in and out for each sensor and output attached to the robot.

Step 2

Next, combine block *After Mikrobotik starts* with block *Play Music (Note-C5, Beat-Double)*. (Note-D5, Beat-Double). (Note-E5, Beat-Double). (Note-F5, Beat-Double). (Note-G5, Beat-Double). (Note-A5, Beat-Double). (Note-B5, Beat-Double)

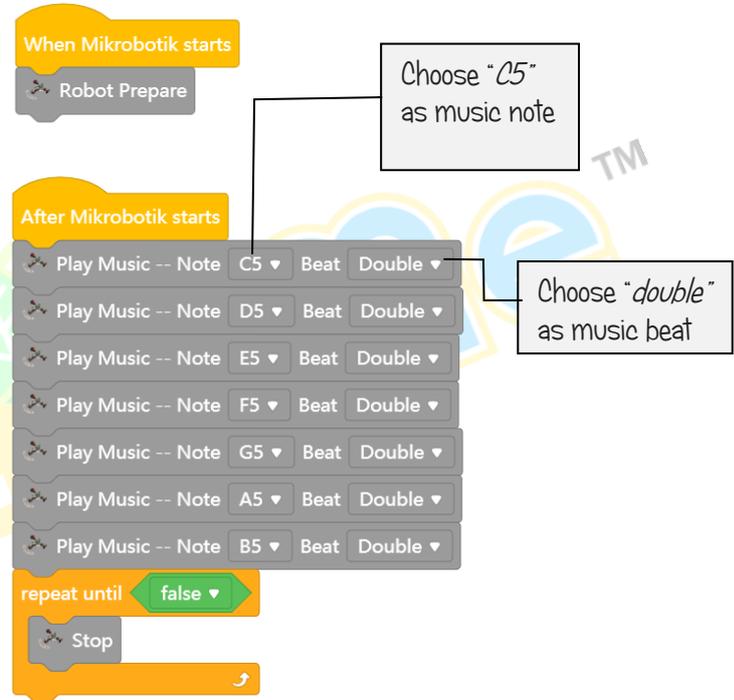

Step 3


Then, combine block *repeat until (false)* with block *stop*. Combine these blocks with blocks in Step 2.

Step 4

Once the program is uploaded, the robot will produce the sound or tone you have entered.

## Challenge!!

In this challenge, you have to enter the provided musical notes and try to guess the name of the music.

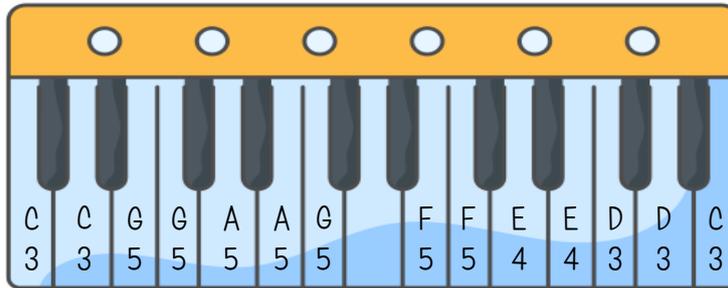


STEM #1 Time™

## Objective 2: Please Switch On The Lights!

Light-Emitting Diode (LED) on robot used as indicators. LEDs on the robot can be seen at power indicator, low battery indicator, LED1, LED2, Arduino NANO and line sensors.

### Introduction to Light-Emitting Diode (LED)

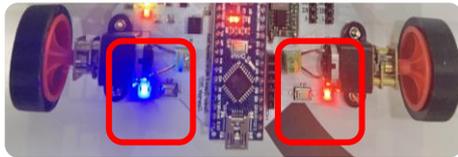

Light-Emitting Diode or LED functions to convert electric current into light and emit light. Used as an application for indicator and light source.

### Step by Step block arrangement:

Step 1 Step 1 Combine block *When Mikrobotik starts* with block *Robot Prepare*






### Step 2

Combine block *After Mikrobotik starts* with block *Turn On LED* with choice of *Status On* and LED #1 and block *wait 1 second*. Put the blocks under the block in Step 1. This program will light up the LED.



### Step 3


Add another block *Turn On LED* with choice of *Status Off* and LED #1 with block *wait 1 second* and combine with block in Step 2 to switch off the LED.

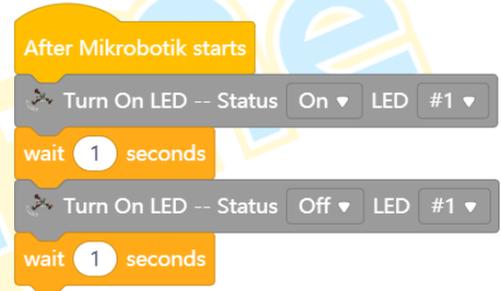

### Step 4

Lastly, upload the program. After the program uploaded, LED 1 will light up in one second and light off in one second. The program will continue to run until the robot is turned off by the user.

## Challenge!!

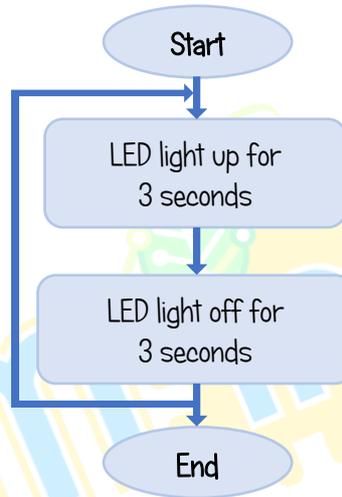


Program above show LED will light up in three seconds and light off in three seconds. The program will continue to run until the Mikrobotik is turned off by the user.

## Objective 3: Our Adventure Begin (Free Movement)



The robot is moved using the code block "tank turn" to move without following the line. This code block is suitable for solving maze circuits (labyrinth). The robot will move depending on the speed and direction of the left and right motors set by user.

### Introduction to Motors

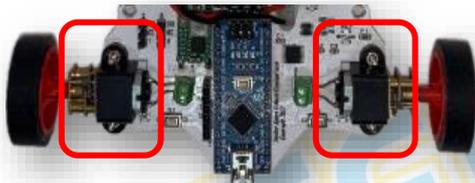

There are two motors on MikroBOTIK that can be controlled separately. They can rotate clockwise and counterclockwise continuously. These motors can also be used to move or drive the project. The speed and duration can also be set.

## Introduction to Basic of Free Movement:

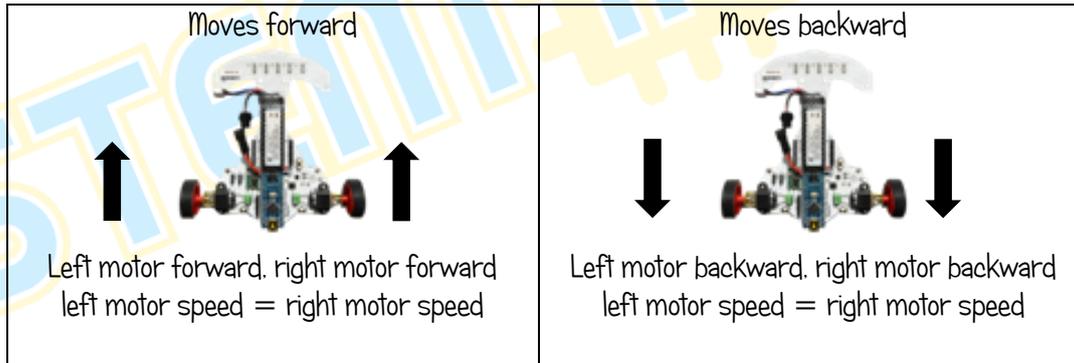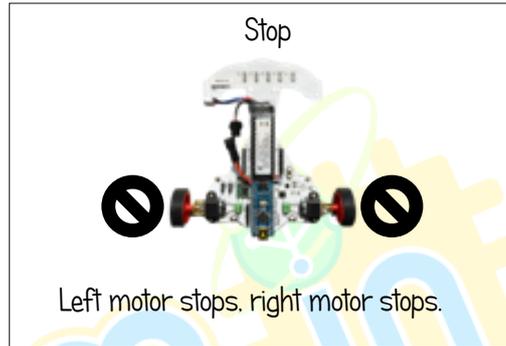

<p>Steer to right</p>  <p>Left motor forward. right motor forward. Left motor speed &gt; Right motor speed</p>	<p>Steer to left</p>  <p>Left motor forward. right motor forward. Left motor speed &lt; Right motor speed</p>
---	---

<p>Sharp steer to right</p>  <p>Left motor forwards. right motor stops.</p>	<p>Sharp steer to left</p>  <p>Left motor stop. right motor forwards.</p>
--	---

<p>Turn to right</p>  <p>Left motor forward. right motor backward left motor speed = right motor speed</p>	<p>Turn to left</p>  <p>Left motor backward. right motor forward left motor speed = right motor speed</p>
---	---


## Step by Step block arrangement

i) Move forwards

Step 1 Combine block *When Mikrobotik starts* with block *Robot Prepare*.



Step 2 Combine block *After Mikrobotik starts* with block *Tank Turn (Wheel Left -Forward, Speed-100, Wheel Right-Forward, Speed-100)*, block *wait(3 seconds)* and block *stop*. Drag those blocks and put it under the blocks in Step 1.  
Left motor and right motor will move with the same speed.

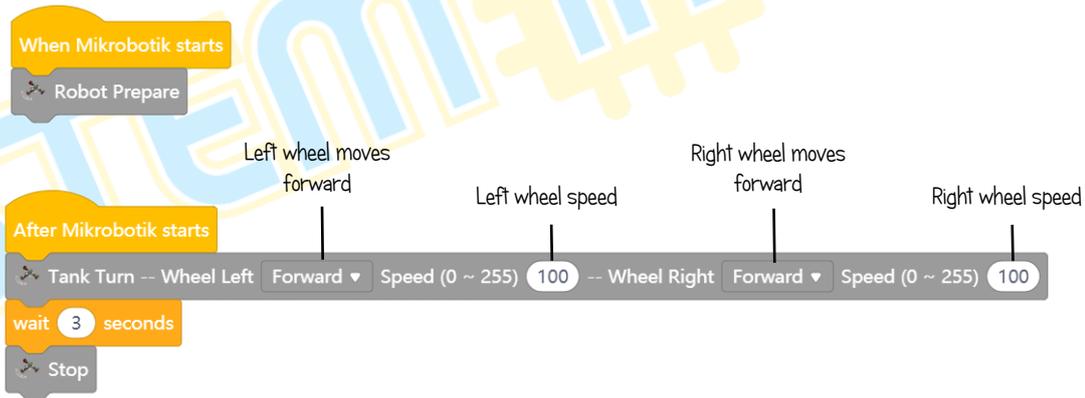

**Step 3** Lastly, combine block *wait*, block *repeat until (false)*, and block *stop* and combine those blocks with blocks in Step 2.



**Step 4** After the program uploaded, MikroBOTIK will move forwards for duration of 3 seconds.

**i** Step to make the robot move backwards is the same as step to move forwards. You only need to change the direction of the left wheel to backward and the direction of the right wheel to backward.


ii) Steer to left

**Step 1** Combine block *When Mikrobotik starts* with block *Robot Prepare*.

**Step 2** Combine block *After Mikrobotik starts* with block *Steer (Direction -Left, Speed-50)*. Then, add block *wait (3 seconds)* and block *stop*. Left motor will stop and right motor will move forwards with the set up speed.

**Step 3** Lastly, combine block *wait (1 second), repeat until (false)* and block *stop* and combine those blocks with blocks in Step 2.

**Step 4** After the program uploaded, Mikrobotik will steer to left for duration of 3 seconds.

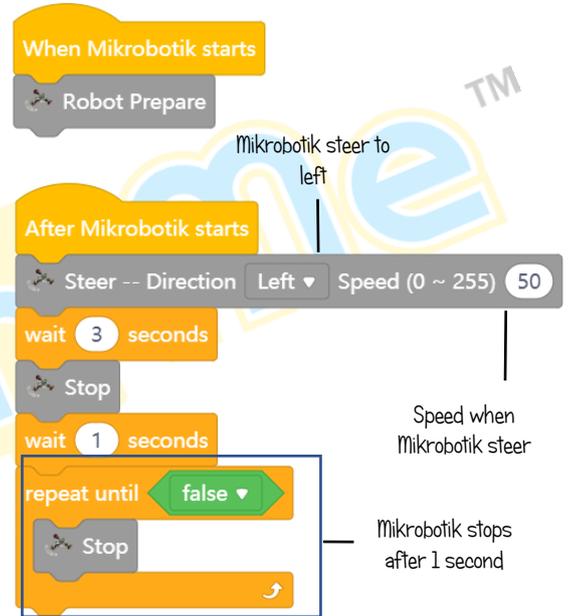


**i** Step for steer to the right is similar to the step for steer to the left. You just need to change the direction to right.

iii) Turns left

**Step 1** Combine block *When Mikrobotik starts* with block *Robot Prepare*.



**Step 2** Combine block *After Mikrobotik starts* with block *Tank Turn (Wheel Left -Backward, Speed-100, Wheel Right-Forward, Speed-100)*, block *wait (3 seconds)* and block *stop*. Drag those blocks to under block in Step 1. The left motor will move backward and the right motor will move forward with the same speed.

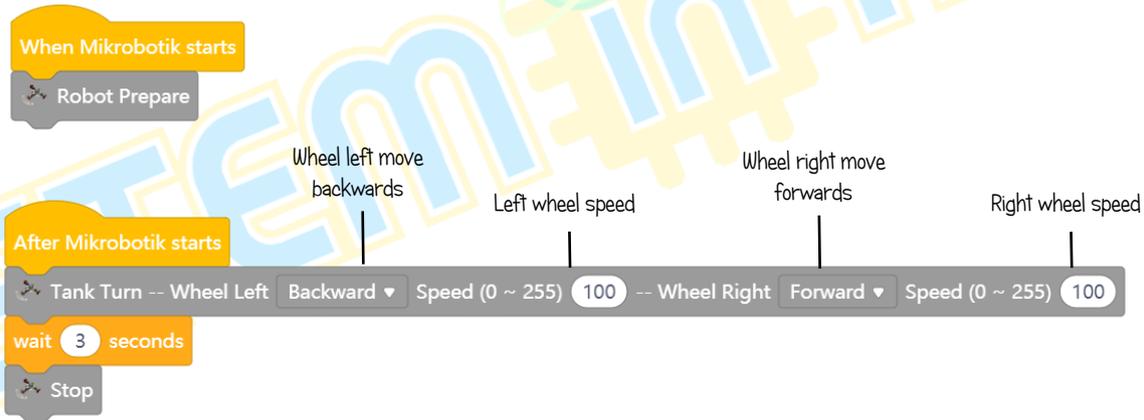

Step 3

Lastly, combine block *wait (1 second)*, *repeat until (false)* and block *stop*. Then, combine those blocks with blocks in Step 2.



Step 4

After program uploaded, Mikrobotik turns left for 3 seconds and stops.




Step for turn to the right is similar to the step for turn to the left. You just need to change the wheel left direction to forward and wheel left direction to backward.



## Objective 4: Let's Follow The Line!

The robot will follow the line (Black or White) continuously. The robot will always move even if it meets a left or right junction.

### Introduction to Line Detector

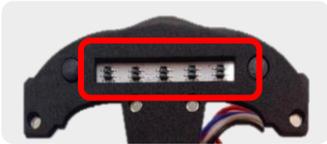

The line detector will emit infrared light and detect black or white surfaces. The analogue reading value will be high if a black surface is detected while the analogue reading value will be low when a white surface is detected.


### Introduction to Line Tracer Time and its Mechanism

*Line Tracer Time* used to make Mikrobotik follow along line with Black or White colour until it reach maximum time period (in ms).

When Mikrobotik reaches the maximum time period. Mikrobotik will stop. Mikrobotik will move continuously without making turn when meeting left junction, right junction and middle junction.


## Step by Step block arrangement:

Step 1 Prepare the arrangement blocks for automatic calibration.

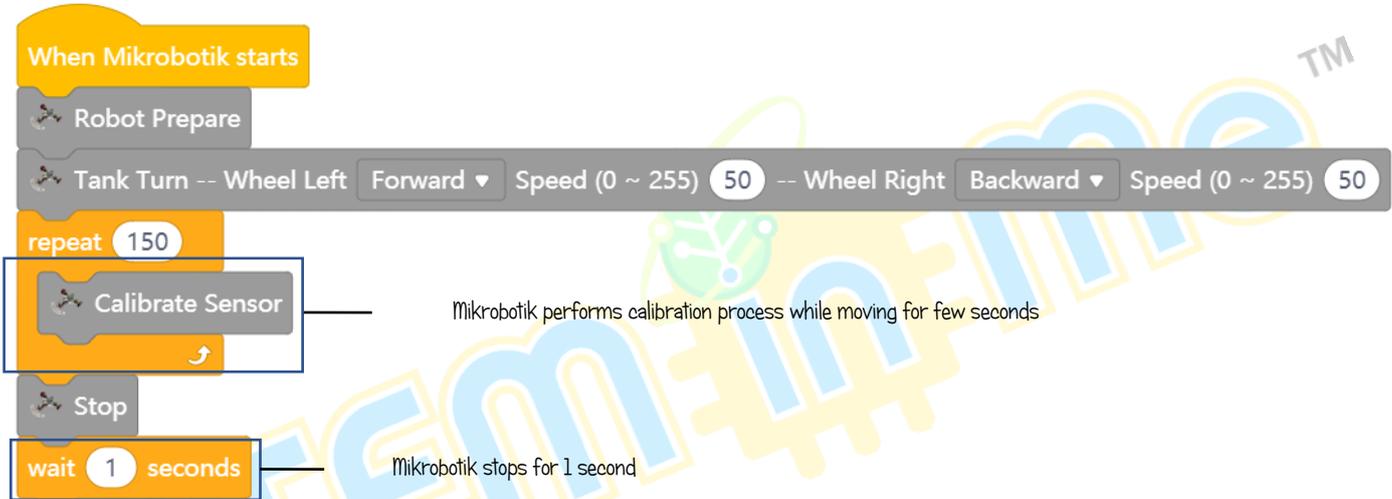

## Step 2

Then, insert block *After Mikrobotik Starts* and combine with block *Line Tracer Time*.

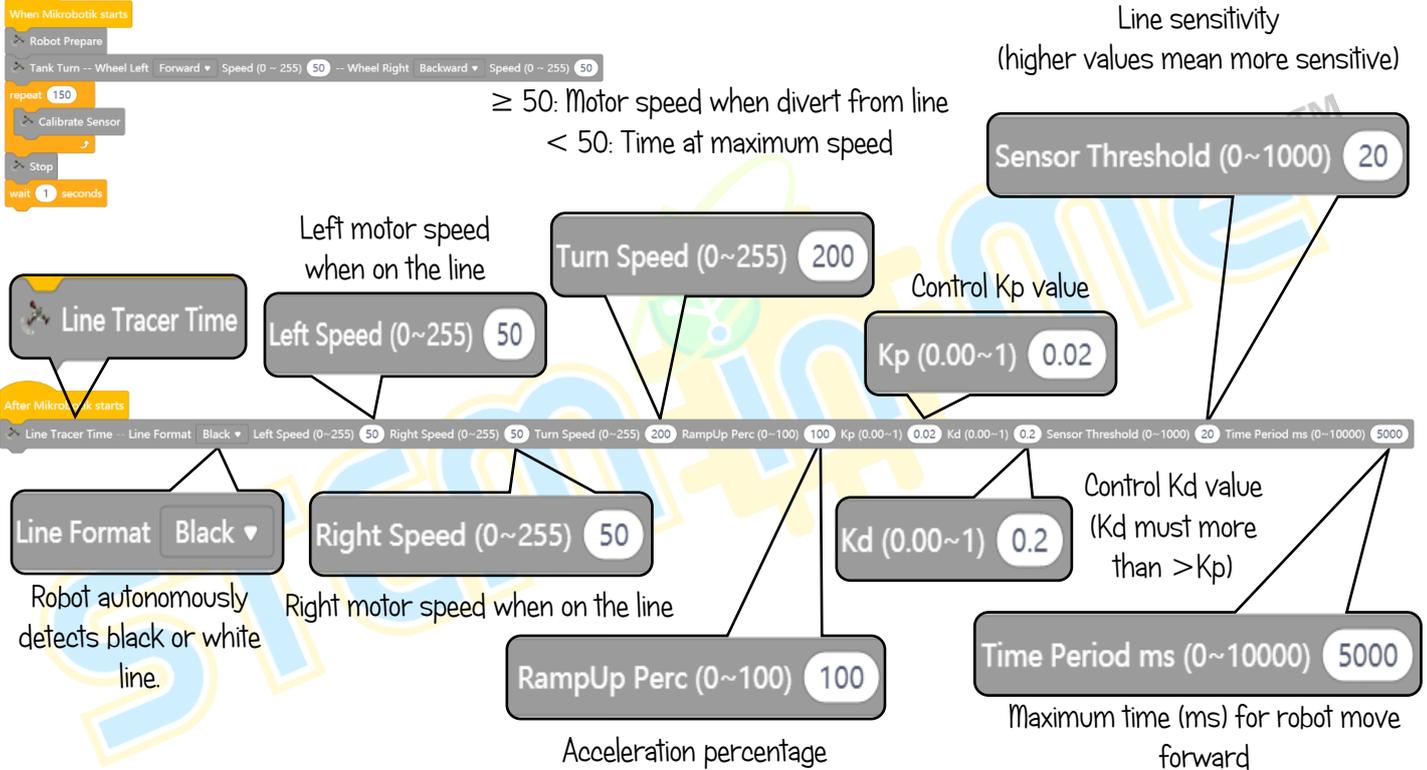


Step 3

After uploading the code, Mikrobotik will start moving forward temporarily. Perform the calibration process on the line sensor. After that, Mikrobotik will follow the line of either Black or White until it reaches the maximum time period (in ms).

## Challenge!!

Apply *Line Tracer Time* to solve the track below.

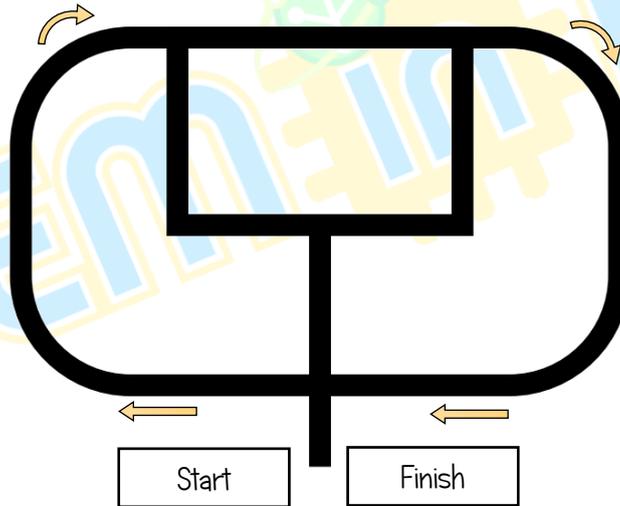



## Objective 5: What To Do When Meeting Junction?

Robot will move autonomously and can decide whether to turn left, turn right or stop at the junction. The technique used to know as *Steer Turn Method*.

### Introduction to *Path Finder* and its Mechanism

*Path Finder* is used to move the Mikrobotik autonomously follow over a white or black line until the Mikrobotik finds a junction (right or left or middle or dead end or offset).


At the junction, Mikrobotik will act to turn (left or right or stop) for a set period of time or until the robot finds the next line and will stop.

Robot will turn by using *Steer Turn Method*.

## Step by Step Block Arrangement:


Step 1

Prepare the blocks arrangement for automatic calibration.

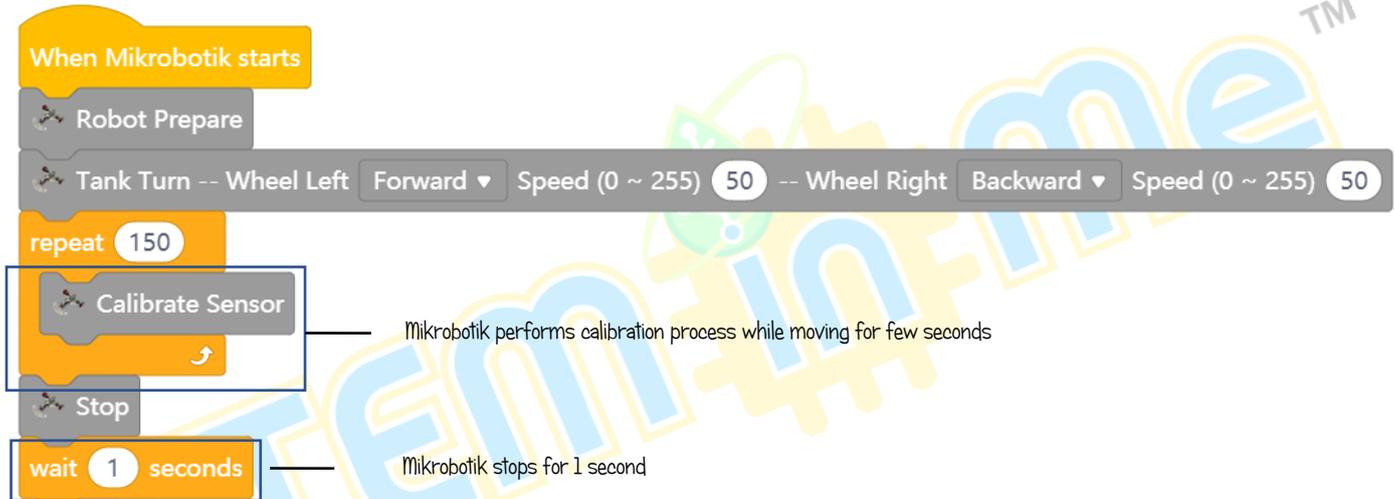

**Step 2**

Lastly, combine block *After Mikrobotik Starts* and block *Path Finder (Line Format-Black Junction-Left, Action-Turn Left, Left Speed-50, Right Speed-50, Turn Speed-200, RampUp Perc-100, Kp-0.02, Kd-0.2, Sensor Threshold-20, Junction Speed-50, Forward Delay-50, Turn Period ms-300)*.

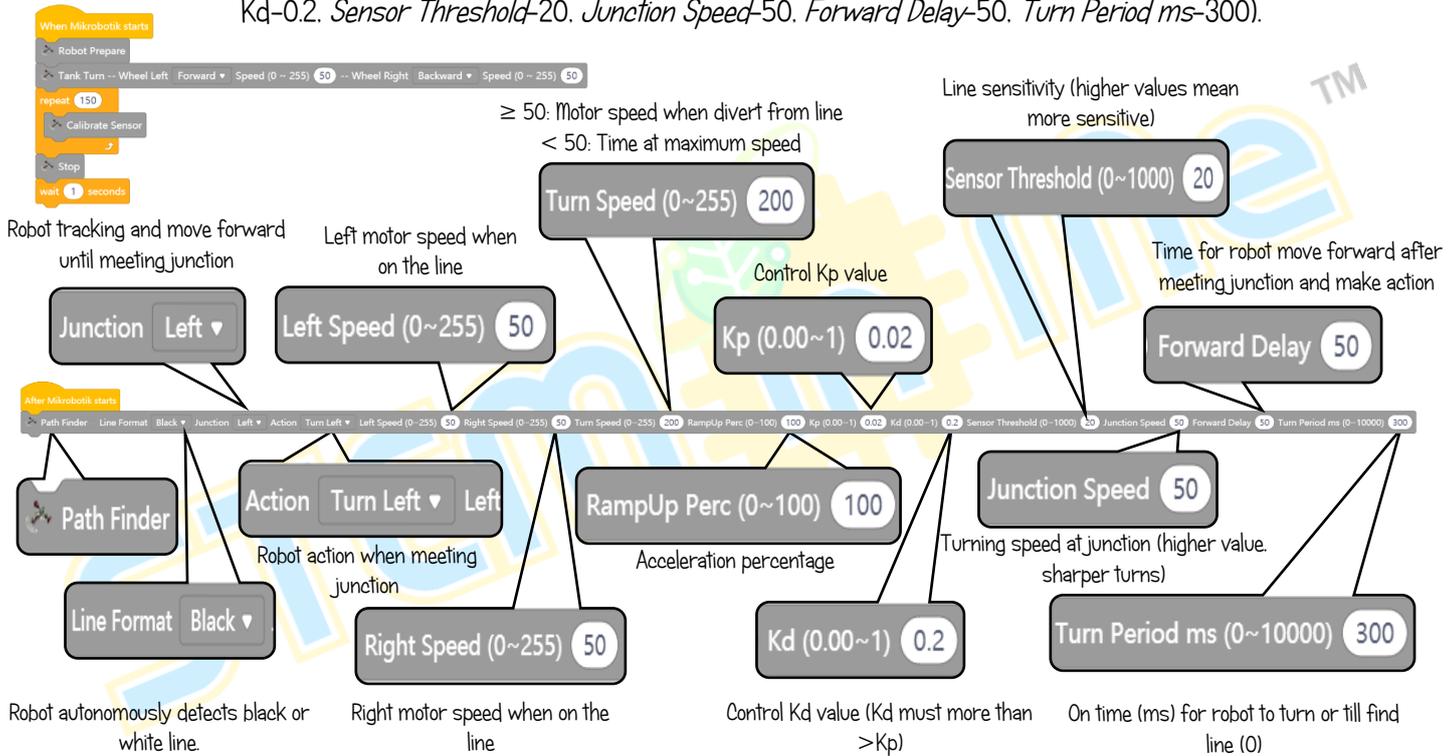


## Step 3


After uploading the code, turn on the Mikrobotik switch and perform the calibration process. After that, Mikrobotik will follow the black line and if the robot meets a left junction, Mikrobotik will move forward and then turn to enter the left junction until Mikrobotik meets another line.

## Challenge!!


- i) *Path Finder* Left Junction, steer left at left junction.

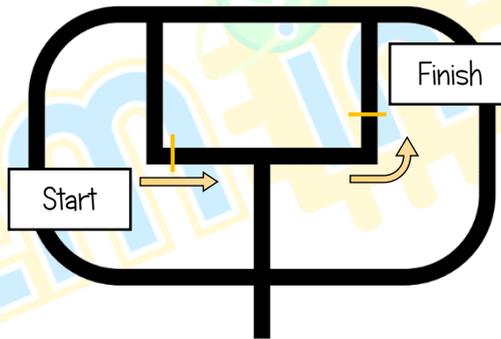

ii) *Path Finder* Right Junction, steer right at right junction.

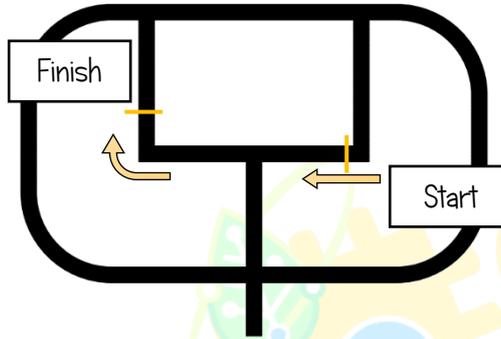

iii) *Path Finder* Middle Junction, stop.

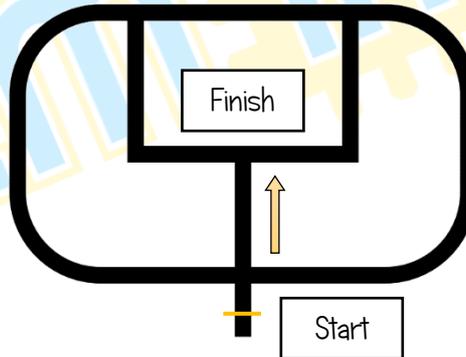

## Objective 6: What Else Can Be Done When Meeting Junction?

Robot will move autonomously and can decide whether to turn left, turn right or stop at the intersection. The technique used known as *Tank Turn Method*.

### Introduction to *Path Finder Tank* and its Mechanism


Mikrobotik travel autonomously on lines (Black or White or Thin Black or Thin White) until meet an intersection (Left or Right or Middle or Dead End or Offset).

At the junction, Mikrobotik will act (Turn left or Turn right or Stop) for at least the Minimum Turn Period (*Min Turn Period*) and continue turning until it detects the line and stops.

Mikrobotik will turn by using *Tank Turn Method*.


## Step by Step block arrangement:

Step 1 Prepare the blocks arrangement for automatic calibration.

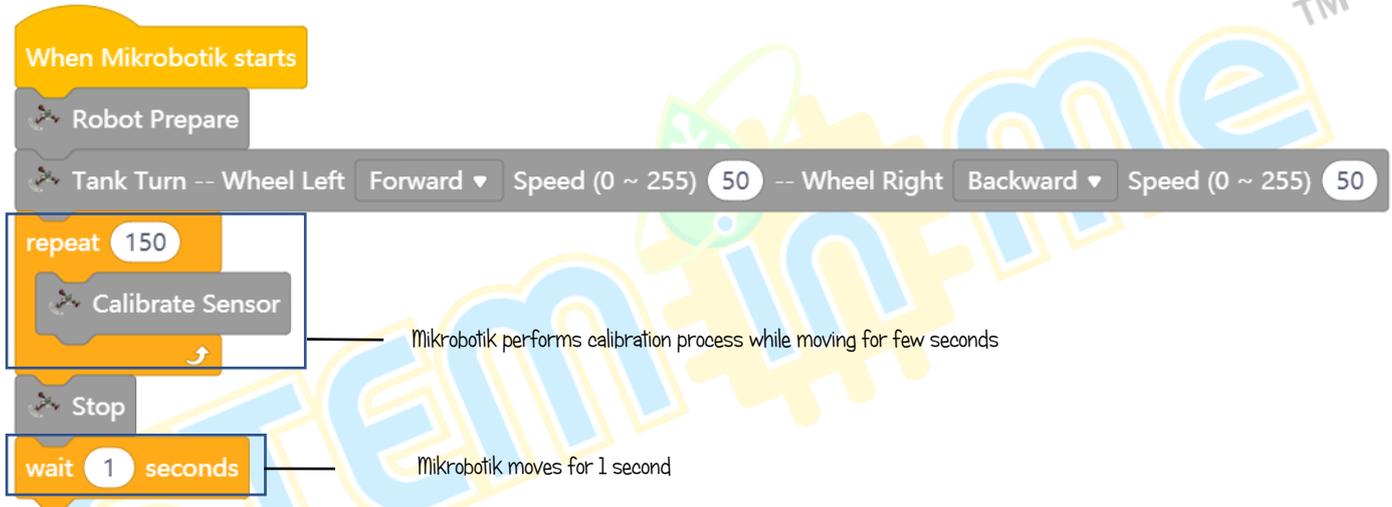

## Step 2

Combine block *After Mikrobotik starts* with block *Path Finder Tank* (Line Format- Black, Junction- Right, Action-Turn Left, Left Speed-50, Right Speed-50, Turn Speed-200, RampUp Perc-100, Kp-0.02, Kd-0.2, Sensor Threshold-20, Junction Speed-50, Forward Delay-50, Min Turn Period ms-200).

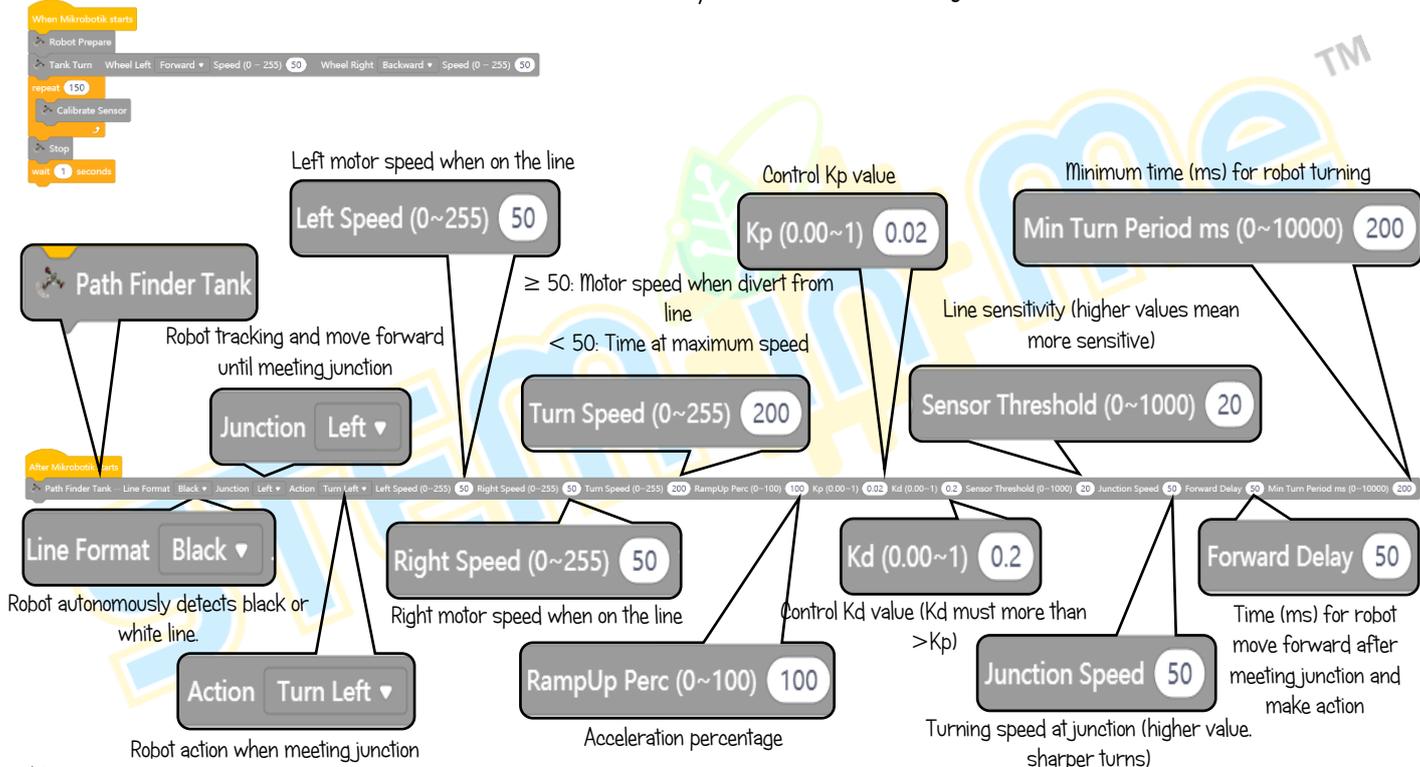


## Step 3


After uploading the code, turn on the Mikrobotik switch and perform the calibration process. After that, Mikrobotik will follow the black line and if the robot finds a left junction, Mikrobotik will move forward and then turn for at least the Minimum Turn Period (*Min Turn Period*) and continue turning until it detects the line and stops.

## Challenge!!


- i) *Path Finder Tank* Right Junction, turn at right junction

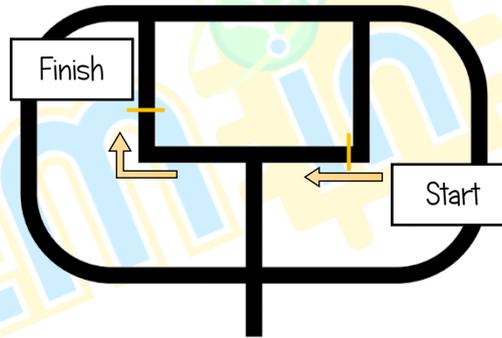

ii) *Path Finder Tank* Left Junction. turn at left junction

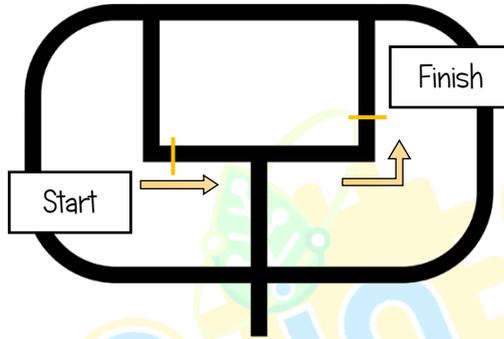

iii) *Path Finder Tank* Middle Junction. stop

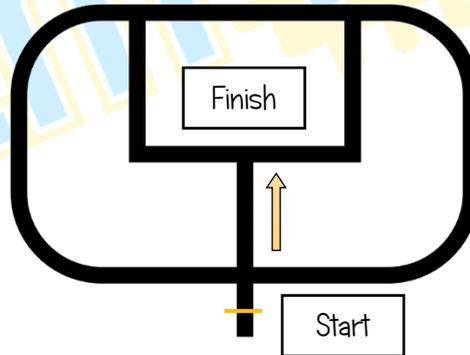

## Objective 7: Wrong way? Make U-turn

Mikrobotik can make a U-turn on the line it passes through 180 degrees on its axis and turn left or right during the Minimum Turn Duration (Min Turn Period) and continue until it meets the line (Black or White).


### Introduction to *Turn At Centre* and its Mechanism

Mikrobotik will make a tank turn in the direction (left or right) for the Minimum Turn Duration (Min Turn Period) until the robot finds the line and finally stops.

This technique is useful for making U-turns.

## Step by Step blocks arrangement:

Step 1 Prepare the arrangement blocks for automatic calibration.

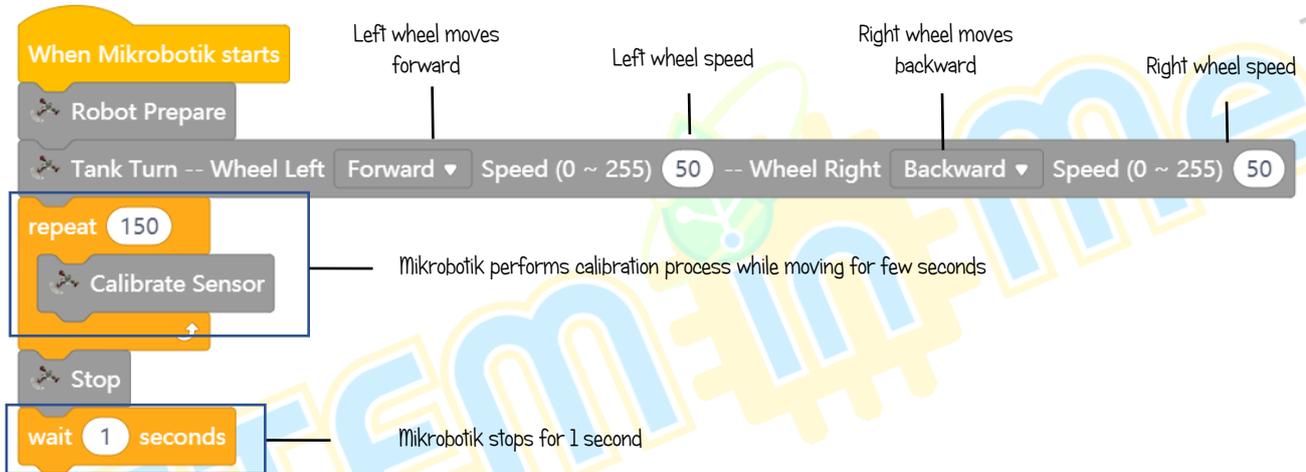

Step 2 Combine block *Turn At Centre (Line Format- Black Direction Turn-Left. Speed-50. Sensor Threshold-20. Min Turn Period-200)* with block *wait (1 second)*. Combine those blocks with blocks in Step 1.



**Step 3**

After uploading the code, turn on the Mikrobotik switch and perform the calibration process. After that, Mikrobotik will make a U-turn according to the set direction and will stop after detect the black line.



## Objective 8: Let's Control Mikrobotik

Bluetooth is a short distance wireless technology used for data exchange between fixed and mobile devices in close range. Besides, it can build private network area. Bluetooth allows Mikrobotik to exchange the desired data with other devices directly.

### Introduction to Bluetooth and its Mechanism



Mikrobotik can be controlled in close range using the Bluetooth approach as it can be found and controlled easily. The Bluetooth module is inserted into the port provided. This Bluetooth module contains 4 pins which are RXD, TXD, GND, and VCC.

## Step by Step block arrangement:

Step 1

Insert block *When Mikrobotik Starts* and combine with block *Robot Prepare*

When Mikrobotik starts

Robot Prepare

Step 2

Combine block *After Mikrobotik starts* with block *if* after combined with block *Bluetooth Data Check*. Put those blocks under the block in Step 1.

When Mikrobotik starts


Robot Prepare

After Mikrobotik starts

if then


Step 3

Under the block *After Mikrobotik starts*, combine 5 blocks *Bluetooth Data Control Data (F, B, L, R, X)* with 5 blocks *if* and under the block *then* combine with 5 blocks *Tank Turn* to get forward, backward, turn to left, turn to right and stop movement.

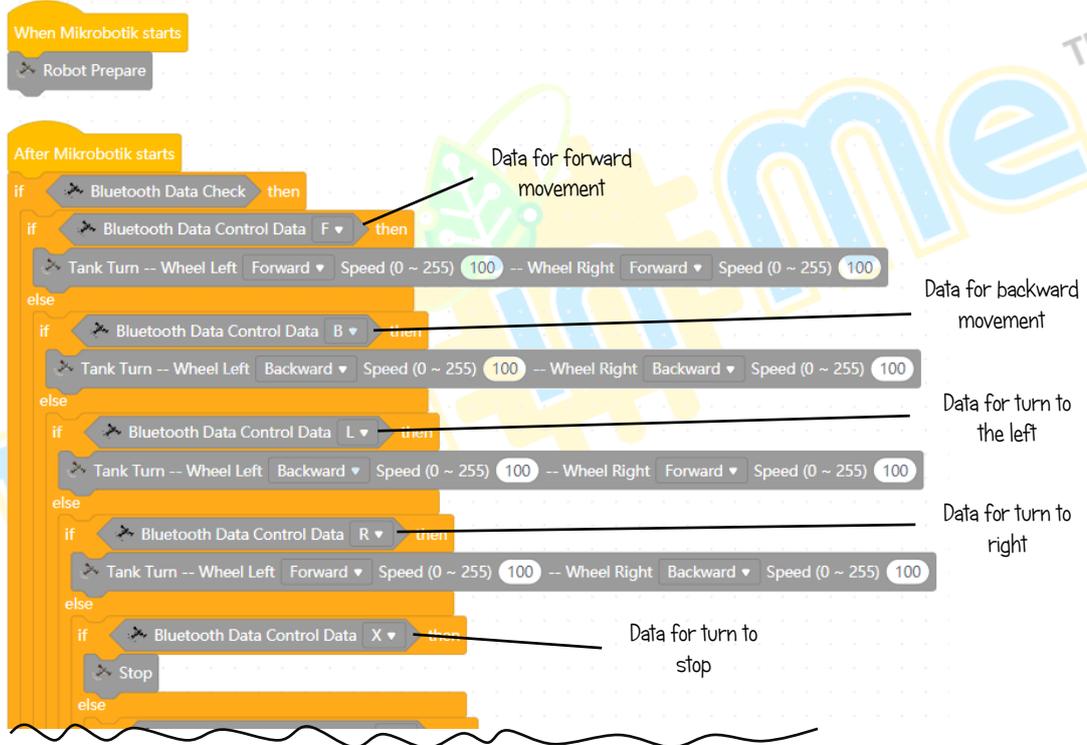


Step 4

For the next block, combine 6 blocks *Bluetooth Data Control Data (T, S, E, Q, C, Z)* with 6 blocks *if* and under the block *then* combine with 2 blocks *Play Music (Note-C3, Beat Half)* and 4 blocks *Tank Turn* to get forward and steer right, forward and steer left, backward and steer left, backward and steer right movement.

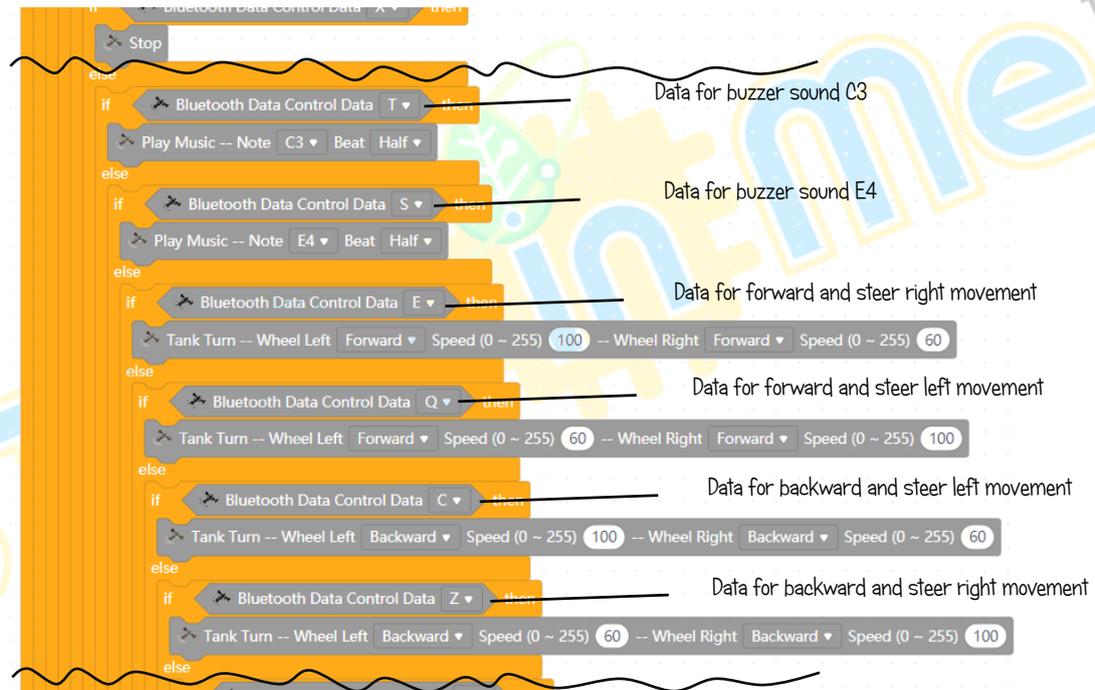



Step 5

For the next block, combine 5 blocks *Bluetooth Data Control Data* (1, 2, 3, 4, 5) with 5 blocks *if* and under the block *then* combine with 2 blocks *Turn On LED* (#1 On, #1 Off, #2 On, #2 Off) and 1 block *Play Music* (Note-A3, Beat Whole).

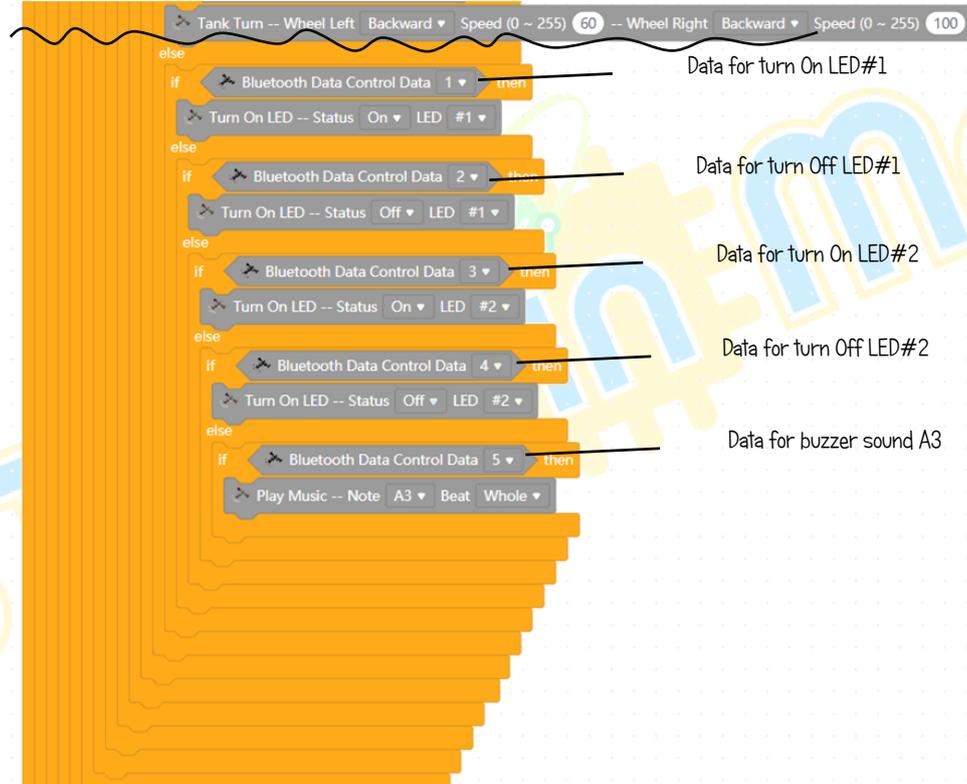

## Step 6

After uploading the code, pair the Bluetooth module on the Mikrobotik and match it with the device. Mikrobotik is ready to be controlled by the device. Make sure all Bluetooth pins are connected to the Bluetooth port (RXD-RX, TXD-TX, GND-GND, VCC-VCC)

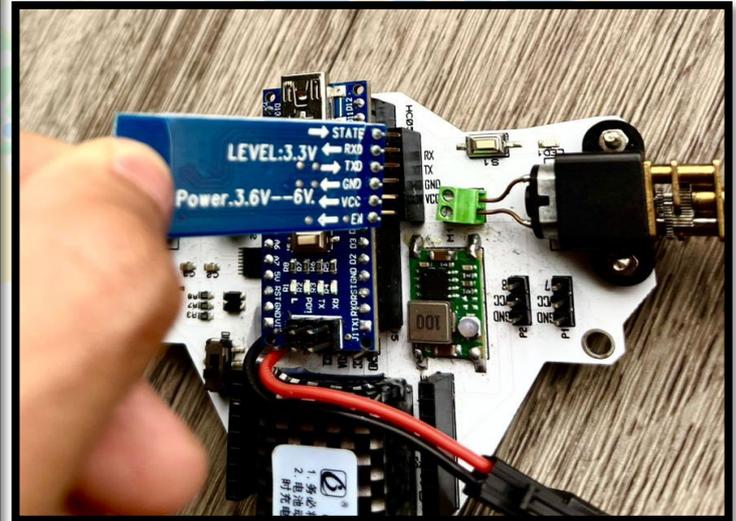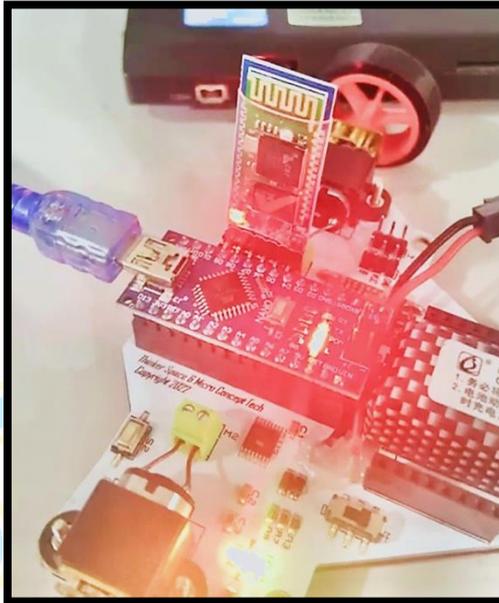



## Mikrobotik Mobile Apps

Step 1

Download application from:


<https://www.microconcept.com.my/stem-robotic/download/>



MIKROBOTIK

Step 2

Open application and click on "Bluetooth connection". Choose based on the number of Bluetooth.

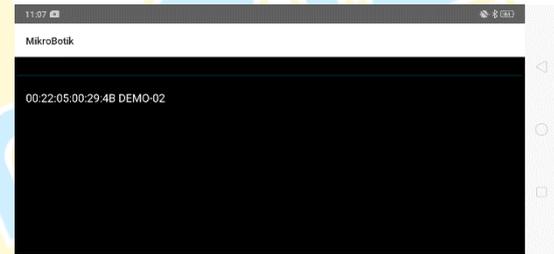

Step 3

Make sure "Connected" displayed. Now Mikrobotik can be controlled in free movement.





## Objective 9: We Need Area Patrol!

Sometimes a robot needs to use more than one block to complete a task such as "area patrol robot". To patrol an area, the robot needs to move along a line at varying speeds and for a certain distance or time. In addition, while following the line, the robot has to make a turn in the opposite direction.

### Introduction to Movement and Its Mechanisms


The technique used is to combine several *Line Tracer Time* blocks and *Turn at Centre* blocks.

The robot moves autonomously following the line using the *Line Tracer Time* block with high speed and then with low speed for a certain time. After finishing moving, the robot makes a turn in the opposite direction using the *Turn at Centre* block. Finally the robot moves again autonomously by using the *Line Tracer Time* block with high speed.

Here is a sketch of the movement of the "area patrol robot" with a set time and speed and make a turn to complete the task.




- i) The robot moves autonomously to the end point using *Line Tracer Time* at high speed for 4 seconds.

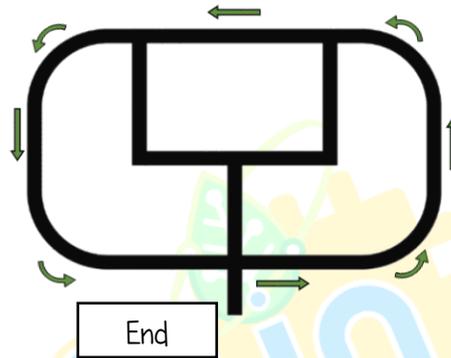

STEM in me™

## Step by Step Block Arrangement:

Step 1 Set up an automatic calibration block arrangement.

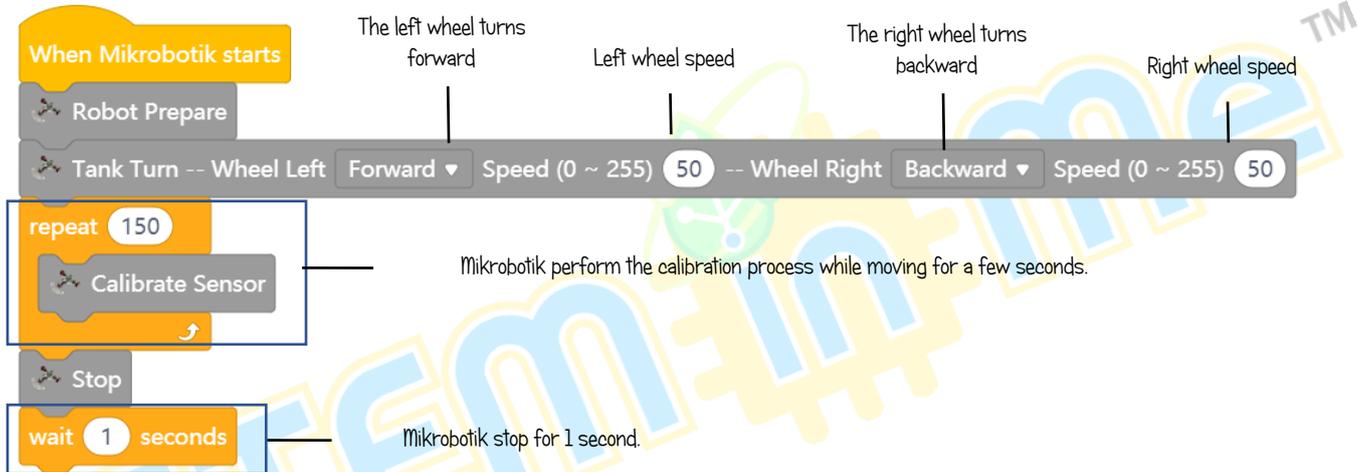

Step 2 Combine the *After Mikrobotik starts* block with the *repeat until* block. After that, add a *Line Tracer Time* block by setting the speed to 80 within 3 seconds. Then, add another *Line Tracer Time* block by setting the speed to 30 within 3 seconds.

```

After Mikrobotik starts
repeat until User Button -- Button #51
  Blink All LED -- Time (ms) 100
  Line Tracer Time -- Line Format Black -- Left Speed (0-255) 80 Right Speed (0-255) 80 Turn Speed (0-255) 200 RampUp Perc (0-100) 100 Kp (0.00-1) 0.02 Kd (0.00-1) 0.2 Sensor Threshold (0-1000) 20 Time Period ms (0-10000) 3000
  Line Tracer Time -- Line Format Black -- Left Speed (0-255) 30 Right Speed (0-255) 30 Turn Speed (0-255) 200 RampUp Perc (0-100) 100 Kp (0.00-1) 0.02 Kd (0.00-1) 0.2 Sensor Threshold (0-1000) 20 Time Period ms (0-10000) 3000
  
```

Step 3

Add a *Turn at Centre* block and set it to make a left turn. Add another *Line Tracer Time* by setting the speed to 80 for 3 seconds. Then, add another *Line Tracer Time* block by setting the speed to 80 in 4 seconds.

```

After Mikrobotik starts
repeat until User Button -- Button #51
  Blink All LED -- Time (ms) 100
  Line Tracer Time -- Line Format Black -- Left Speed (0-255) 80 Right Speed (0-255) 80 Turn Speed (0-255) 200 RampUp Perc (0-100) 100 Kp (0.00-1) 0.02 Kd (0.00-1) 0.2 Sensor Threshold (0-1000) 20 Time Period ms (0-10000) 3000
  Line Tracer Time -- Line Format Black -- Left Speed (0-255) 30 Right Speed (0-255) 30 Turn Speed (0-255) 200 RampUp Perc (0-100) 100 Kp (0.00-1) 0.02 Kd (0.00-1) 0.2 Sensor Threshold (0-1000) 20 Time Period ms (0-10000) 3000
  Turn At Centre -- Line Format Black -- Direction Turn Left -- Speed (0-255) 50 Sensor Threshold (0-1000) 20 Min Turn Period ms (0-1000) 200
  Line Tracer Time -- Line Format Black -- Left Speed (0-255) 80 Right Speed (0-255) 80 Turn Speed (0-255) 200 RampUp Perc (0-100) 100 Kp (0.00-1) 0.02 Kd (0.00-1) 0.2 Sensor Threshold (0-1000) 20 Time Period ms (0-10000) 4000
  
```




Step 4

After uploading the code, turn on the Mikrobotik switch and perform the calibration process. After that, Mikrobotik will make all movements according to the set time and will stop after the set time.




## Objective 10: Let's Find Hidden Treasures.

Sometimes the robot needs to use more than one block to complete a task such as "robot looking for hidden treasure". In order to get all five hidden treasures, the robot needs to go through many intersections, among which are left junctions, right junctions and 3-way junctions. Sometimes the robot needs to turn at different speeds to enter the junction.

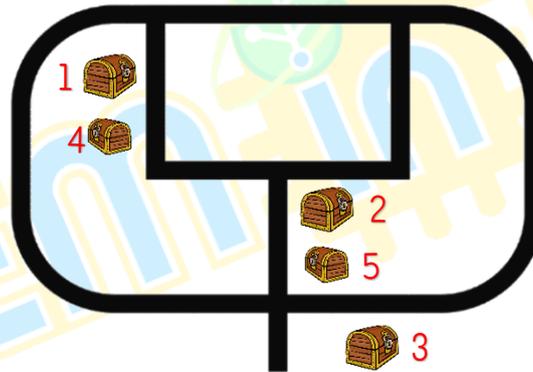

## Introduction to Push Button

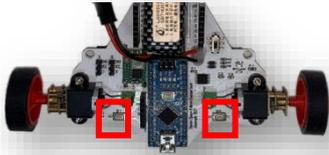

A push button is a type of switch that functions to control a machine directly through the touch of a hand or finger from the user or the surface of a component. MikroBotik has push buttons S1 and S2. The analog reading value will be less than 400 when S1 is pressed while the analog reading will be less than 500 when S2 is pressed.

## Introduction to Movement and Its Mechanisms.


The technique used is to combine several *Path Finder* and *Path Finder Tank* blocks.

By using the *Path Finder* or *Path Finder Tank* block, the robot will move autonomously following the black or white line until it finds an intersection and then the robot will turn towards the specified intersection.


To get the first hidden treasure, the robot moves using the *Path Finder* until it finds a left intersection and turns to the left. Then, the robot continues moving using the *Path Finder* until it finds a right intersection and turns to the right for the second hidden treasure. Next, the robot continues moving using the *Path Finder* until it finds a 3-way junction and turns left for the third hidden treasure. After that, to get the fourth haunted treasure the robot needs to use the *Path Finder Tank* until it meets the left intersection and turn left and finally to get the last haunted treasure the robot needs to use the *Path Finder Tank* until it finds the right intersection and turns right.

Here is a sketch of the movement of the robot searching for hidden treasures by going through different intersections to complete the task.


- i) The robot moves from the starting point to find the left junction and turns using the *Path Finder* to the left to pick up the first hidden treasure.

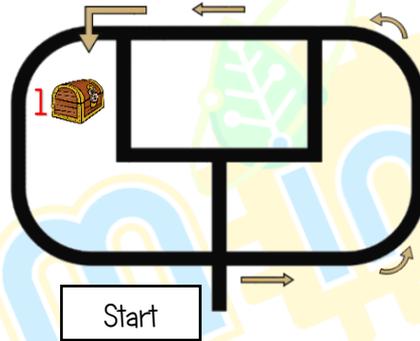

- ii) The robot moves to find the right junction and turns using the *Path Finder* round to the right to pick up the second hidden treasure.

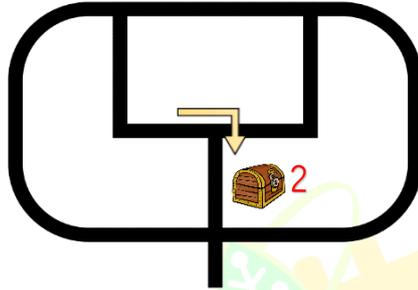

- iii) The robot moves to find the 3-way intersection and turns using the *Path Finder* to the left to pick up the third hidden treasure.

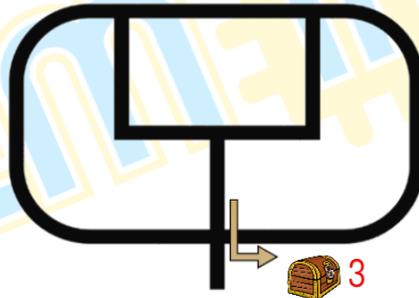


- iv) The robot moves again to find the left junction and turns using the *Path Finder Tank* to the left to pick up the fourth hidden treasure.



## Step by Step Block Arrangement:

**Step 1** Set up an automatic calibration block arrangement.

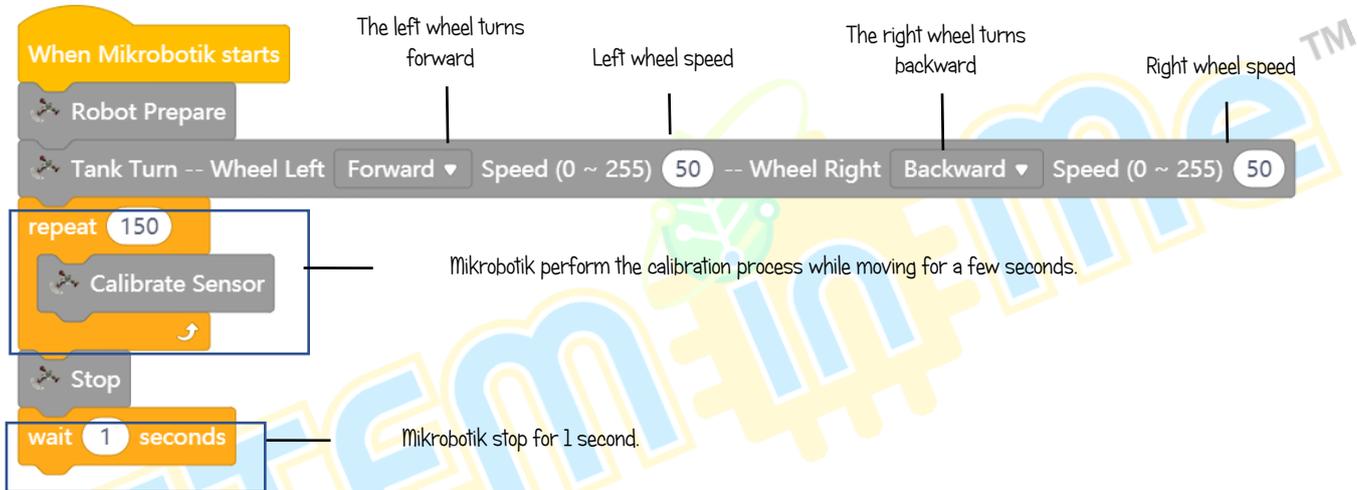

**Step 2** Combine the *After Mikrobotik starts* block with the *repeat until* block. After that, add the *Path Finder* block and set it (*Junction* – *Left*: *Action* – *Turn Left*: *Speed* – *60*: *Turn Speed* – *200*: *Junction Speed* – *200*: *Forward Delay* – *400* and *Turn Period* – *400*).




### Step 3

Add a new *Path Finder* block and set the value to (*Junction – “Right”. Action – “Turn Right”. Speed – “60”. Turn Speed – “200”. Junction Speed – “50”. Forward Delay – “0” and Turn Period – “600”*).




### Step 4

Add a new *Path Finder* block and set the value to (*Junction – “Middle”. Action – Turn Left”. Speed – “60”. Turn Speed – “200”. Junction Speed – “100”. Forward Delay – “250” and Turn Period – “300”*).

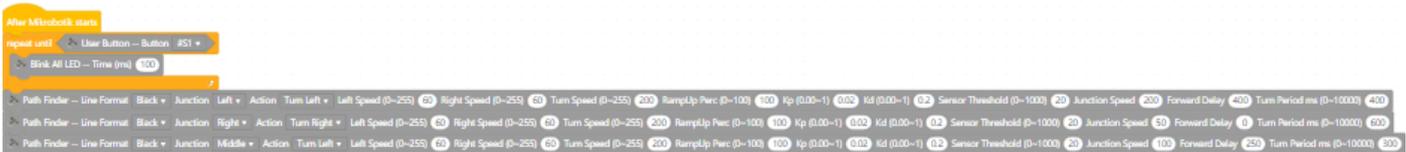


### Step 5

Add a *Path Finder Tank* block and set the value to (*Junction – “Left”: Action – Turn Left”: Speed – “70”: Turn Speed – “100”: Junction Speed – “100”: Forward Delay – “350”* and *Min Turn Period – “200”*).

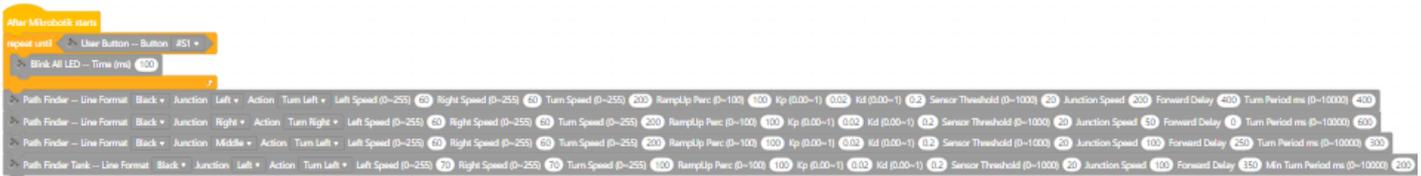

### Step 6

Add a new *Path Finder Tank* block and set the value to (*Junction – “Right”: Action – Turn Right”: Speed – “40”: Turn Speed – “100”: Junction Speed – “100”: Forward Delay – “150”* and *Min Turn Period – “50”*).

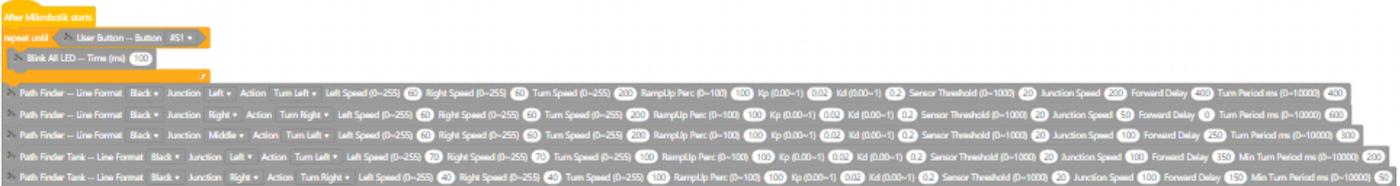



Step 7

After uploading the code, turn on the Mikrobotik switch and perform the calibration process. After that, Mikrobotik will move to find the designated intersection and make a circle until it finds the hidden treasure.



## Extra: Try Upgrade and Self Program

DEVICE PORT	ARDUINO NANO PIN	PERIPHERALS	ADDITIONAL INFO
ITR1	A6	Line Detection Sensor – Outer Left	ITR8307
ITR2	A3	Line Detection Sensor – Inside Left	ITR8307
ITR3	A2	Line Detection Sensor – Middle	ITR8307
ITR4	A1	Line Detection Sensor – Inside Right	ITR8307
ITR5	A0	Line Detection Sensor – Outer Right	ITR8307
S1	A7	User Switch S1	Value < 100
S2	A7	User Switch S2	Value ≥ 100 & < 400
BUZZER	D2	Buzzer	
LED1	D13	Indicator Light L1	
LED2	D12	Indicator Light L2	
M1 – AIN1	D5	Left Motor – Bridge A Input 1	DRV8833 Dual H-Bridge Motor Driver
M1 – AIN2	D6	Left Motor – Bridge A Input 2	DRV8833 Dual H-Bridge Motor Driver
M2 – BIN1	D3	Right motor – Bridge B Input 1	DRV8833 Dual H-Bridge Motor Driver
M2 – BIN2	D9	Right motor – Bridge B Input 2	DRV8833 Dual H-Bridge Motor Driver
P1	D7	Open Pot P1	
P2	D8	Open Pot P2	
BT – TX	D10	Bluetooth Pot TX	
BT – RX	D11	Bluetooth Pot RX	



# MERAKYATKAN TEKNOLOGI

- Industry 4WRD
- Pemikiran Kreatif
- Pembudayaan Inovasi
- Kesejahteraan Hidup
- Kelestarian Alam
- Pembelajaran  
Menyeronokkan

## PENGLUAR:

MICRO CONCEPT TECH SDN BHD  
1230153-W

No. 5-5, Pusat Dagangan Shah Alam,  
Persiaran Damai, Seksyen 11,  
40100 Shah Alam, Selangor, Malaysia

  @steminme



 <http://www.microconcept.com.my>

 [steminme@microconcept.com.my](mailto:steminme@microconcept.com.my)